


YidTran

Yidi Precision Machinery

上海乙谛精密机械有限公司

Z型胀紧套 规格参数

胀紧套 结构分解示意图

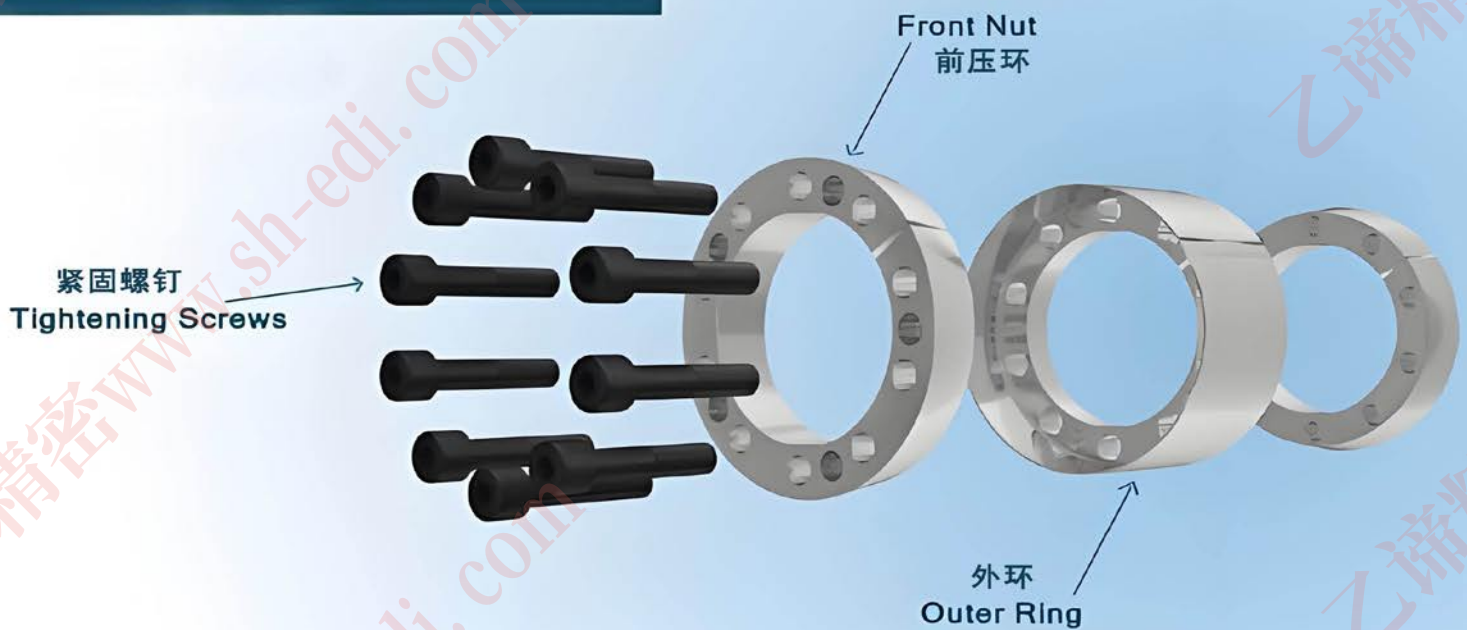


上海乙谛精密机械有限公司

2026

Z1 型胀紧套规格参数表

-----上海乙谛精密机械有限公司-----产品规格表-----

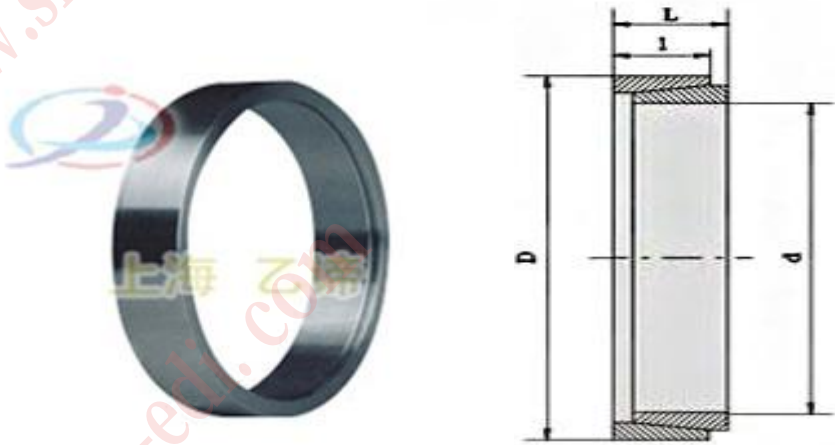


胀紧套规格参数					当 Pf=100N/mm2 时的额定负荷		重 量 kg
型号	d	D	L	1	轴 向 力 F1	转 矩 M1	
					KN	KN·m	
Z1-10X13	10	13	4.5	3.7	1.4	0.007	0.01
Z1-12X15	12	15			1.6	0.0098	0.01
Z1-13X16	13	16			1.8	0.011	0.01
Z1-14X18	14	18	6.3	5.3	2.8	0.019	0.01
Z1-15X19	15	19			3.0	0.022	0.01
Z1-16X20	16	20			3.2	0.025	0.01
Z1-17X21	17	21			3.4	0.028	0.01
Z1-18X22	18	22			3.6	0.032	0.01
Z1-19X24	19	24			3.8	0.035	0.01
Z1-20X25	20	25			4.0	0.04	0.01
Z1-22X26	22	26			4.5	0.05	0.01
Z1-25X30	25	30			5.0	0.06	0.01
Z1-28X32	28	32			5.6	0.08	0.01
Z1-30X35	30	35	7.0	6.0	6.0	0.09	0.01
Z1-32X36	32	36			6.4	0.10	0.01
Z1-35X40	35	40			8.2	0.15	0.02
Z1-40X45	40	45	8.0	6.6	9.9	0.20	0.02
Z1-45X52	45	52	10.0	8.6	14.6	0.33	0.04
Z1-50X57	50	57			16.2	0.40	0.05
Z1-55X62	55	62			17.8	0.49	0.05
Z1-60X68	60	68	12.0	10.4	23.5	0.70	0.07
Z1-65X73	65	73			25.6	0.83	0.08
Z1-70X79	70	79	14.0	12.2	32.0	1.12	0.11
Z1-75X84	75	84			34.4	1.29	0.12

Z1-80X91	80	91	17.0	15.0	45.0	1.81	0.19
Z1-85X96	85	96			48.0	2.04	0.20
Z1-90X101	90	101			51.0	2.29	0.22
Z1-95X106	95	106			54.0	2.55	0.23
Z1-100X114	100	114	21.0	18.7	70.0	3.50	0.38
Z1-105X119	105	119			73.2	3.82	0.40
Z1-110X124	110	124			77.0	4.25	0.41
Z1-120X134	120	134			84.0	5.05	0.45
Z1-125X139	125	139	28.0	25.3	92.0	5.75	0.62
Z1-130X148	130	148			124.0	8.05	0.85
Z1-140X158	140	158			134.0	9.35	0.91
Z1-150X160	150	168			143.0	10.70	0.97
Z1-160X178	160	178	33.0	30.0	152.5	12.20	1.02
Z1-170X191	170	191			192.0	16.30	1.50
Z1-180X201	180	201			204.0	18.30	1.58
Z1-190X211	190	211			214.0	20.40	1.68
Z1-200X224	200	224	38.0	34.8	262.0	26.20	2.32
Z1-210X234	210	234			275	28.90	2.45
Z1-220X244	220	244			288.0	37.70	2.49
Z1-240X267	240	267	42.0	39.5	358.0	43.00	3.52
Z1-250X280	250	280	48.0	44.0	415	52.00	4.68
Z1-260X290	260	290			435.0	56.50	4.82
Z1-280X313	280	313			520.0	72.50	6.27
Z1-300X333	300	333			555.0	83.00	6.47
Z1-320X360	320	360	65.0	59.0	710.0	114.00	10.90
Z1-340X380	340	380			755	128.50	11.50
Z1-360X400	360	400			800	144.00	12.20
Z1-380X420	380	420			845	160.50	12.80
Z1-400X440	400	440			890	178.00	13.50
Z1-420X460	420	460			935	196.00	14.10
Z1-450X490	450	490			998.0	224.50	15.20
Z1-480X520	480	520			1070.0	256.00	16.00
Z1-500X540	500	540			1110.0	278.00	16.50

注：Pf 为胀紧联结套与轴结合面上的压力。

Z2 型胀紧套规格参数表

-----上海乙谛精密机械有限公司-----产品规格表-----

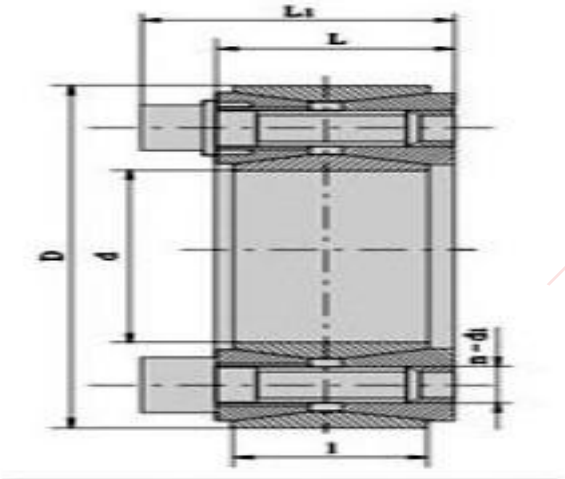

胀紧套基本尺寸							额定负荷		胀套 与轴 结合 面上的 压 力 Pf N/m ²	胀套 与轮 毂结 合面 上的 压力 Pf' N/m ²	螺钉 的 拧 紧 力 矩 MA N·m	重 量 kg	
型 号	d	D	I	L	L1	d 1	n	轴向 力 F1K N					转 矩 M 1 KN·m
	mm												
Z2-17X47	17	47	17	20	27.5	M6	8	27					
Z2-18X47	18												
Z2-19X47	19								0.25	220	90	14	0.20
Z2-20X47	20								0.27	210	90		0.24
Z2-22X47	22								0.30	195	90		0.23
Z2-25X50	25	50					9	30	0.38	190	95	0.25	


Z2-28X55	28	55					10	33	0.47	185	95		0.30	
Z2-30X55	30								0.50	175	95		0.29	
Z2-35X60	35								60	0.70	180		105	0.32
Z2-38X63	38								63	0.88	185		105	0.33
Z2-40X65	40								65	0.92	180		110	0.34
Z2-42X72	42	72	20	24	33.5	M8	12	65	1.36	200	117	35	0.48	
Z2-45X75	45	75						72	1.62	210	125		0.57	
Z2-50X80	50	80						71	1.77	190	115		0.60	
Z2-55X85	55	85					14	83	2.27	200	130		0.63	
Z2-60X90	60	90						2.47	180	120	0.69			
Z2-65X95	65	95						16	93	3.04	190		130	0.73
Z2-70X110	70	110	24	28	39.0	M10	14	132	4.60	210	130	70	1.26	
Z2-75X115	75	115						131	4.90	195	125		1.33	
Z2-80X120	80	120							5.20	180	120		1.40	
Z2-85X125	85	125					16	148	6.30	195	130		1.49	
Z2-90X130	90	130						147	6.60	180	125		1.53	
Z2-95X135	95	135						18	167	7.90	195		135	1.62
Z2-100X145	100	145	14	192	9.60	135	125	2.01						
Z2-105X150	105	150		190	9.98	185		130	2.10					
Z2-110X155	110	155		191	10.50	180		125	2.15					
Z2-120X165	120	165	16	218	13.10	185		135	2.35					
Z2-125X170	125	170	18	220	13.78	180		130	2.95					
Z2-130X180	130	180	34	38	52.0	M12		20	272	17.60	165	120	3.51	
Z2-140X190	140	190					22	298	20.90	165	125	3.85		
Z2-150X200	150	200					24	324	24.20	170	125	4.07		
Z2-160X210	160	210					26	350	28.00		130	4.30		
Z2-170X225	170	225					38	44	60	M14	22	386	32.80	160

	0	5											
Z2-180X235	180	235						24	420	37.80	165	125	6.05
Z2-190X250	190	250	46	52	68			28	490	46.50	150	115	8.25
Z2-200X260	200	260						30	525	52.50	150	115	8.65
Z2-210X275	210	275						24	599	62.89	151	115	10.10
Z2-220X285	220	285						26	620	68.00	150	115	11.22
Z2-240X305	240	305	50	56	74	M16		30	715	85.50	160	125	12.20
Z2-350X315	250	315						32	768	96.00	162	125	12.70
Z2-260X325	260	325						34	800	104.00	165	130	13.20
Z2-280X355	280	355	60	66	86.5	M18		32	915	128.00	145	115	19.20
Z2-300X375	300	375							1020	153.00	150	120	20.50
Z2-320X405	320	405	72	78	100.5	M20			1310	210.00	145	120	29.60
Z2-340X425	340	425						36		224.00	145	115	31.10
Z2-360X455	360	455							1630	294.00		115	42.20
Z2-380X475	380	475	84	90	116.0	M22			1620	308.00	135	110	44.00
Z2-400X495	400	495							1610	322.00	130	105	46.00
Z2-420X515	420	515						40	1780	374.00	135	110	50.00
Z2-450X555	450	555						40	2050	461.25	124	100	65.00
Z2-480X585	480	585						42	2160	518.40		100	71.00
Z2-500X605	500	605	96	102	130.0	M24		44	2240	560.00	123	100	72.60
Z2-530X640	530	640						45	2330	617.00	121	100	83.60
Z2-560X670	560	670						48	244	680.00	120	100	85.00

	0	0					0					
Z2-600X710	60	71					50	258	775.00	118	100	91.00
	0	0						0				
Z2-630X740	63	74					52	268	844.00	117	105	94.00
	0	0						0				
Z2-670X780	67	78					56	282	944.00	116	100	101.00
	0	0						0				
Z2-710X820	71	82					60	297	1054.00	115	100	106.00
	0	0						0				
Z2-750X860	75	86					62	313	1173.00	115	100	112.00
	0	0						0				
Z2-800X910	80	91					66	326	1300.00	112	100	118.00
	0	0						0				
Z2-850X960	85	96					70	350	1487.00	113	100	125.00
	0	0						0				
Z2-900X1010	90	10					75	368	1650.00	112	100	132.00
	0	10						0				
Z2-950X1060	95	10					80	387	1838.00		100	139.00
	0	60						0				
Z2-1000X1110	10	11					82	400	2000.00	110	100	146.00
	00	10						0				
注：Z2 型胀紧联结套螺钉的机械性能等级为 12.9 级。												

Z3 型胀紧套规格参数表

-----上海乙谛精密机械有限公司-----产品规格表-----

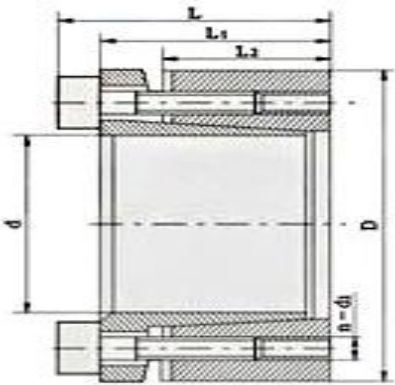


胀紧套基本尺寸							额定负荷		胀套与轴	胀套与轮	螺钉的	重量 kg	
型号	d	D	L	L1	L2	d1	n	轴向力 F1 KN	转 矩 M1 KN·m	结合面上	毂结合面		拧 紧
	mm									的 压 力 Pf N/mm²	上的压力 Pf' N/mm²		力 矩 MA N·m
Z3-20X47	20	47	37	31	21.7	M6	4	30	0.30	287	90	17	0.29
Z3-22X47	22	47							0.33	260	90		0.27
Z3-25X50	25	50					5	35	0.44	287	106		0.30
Z3-28X55	28	55							0.49	256	96		0.36
Z3-30X55	30	55						45	0.53	239	96		0.34
Z3-35X60	35	60							0.81	246	106		0.38
Z3-40X65	40	65	46	38	25.3	M8	6	80	0.94	215	98	41	0.41
Z3-45X75	45	75							1.86	283	134		0.70
Z3-50X80	50	80					7	90	2.07	255	126		0.76
Z3-55X85	55	85							2.54	270	138		0.82
Z3-60X90	60	90					8	105	2.77	247	130		0.88
Z3-65X95	65	95							3.58	261	141		0.94
Z3-70X110	70	110	60	50	33.4	M10	7	140	5.10	244	128	83	2.10
Z3-75X115	75	115							5.46	228	119		2.20
Z3-80X120	80	120							5.85	214	112		2.30
Z3-85X125	85	125					8	175	7.45	230	129		2.40

Z3-90X130	90	130						7.90	217	124	2.60			
Z3-95X135	95	135						205	9.90	257	149		2.70	
Z3-100X145	100	145					10	220	11.00	192	114		3.70	
Z3-105X150	105	150							11.55	210	114		3.90	
Z3-110X155	110	155							12.10	175	107		4.00	
Z3-120X165	120	165						68	58	40.8	12		260	15.70
Z3-125X170	125	170					M12	320	17.50	189	120	145	4.80	
Z3-130X180	130	180							10	20.70	188		120	5.90
Z3-140X190	140	190								22.50	175		114	6.30
Z3-150X200	150	200						77	65	45.4			12	380
注：Z3 型胀紧联结套螺钉的机械性能等级为 12.9 级。														

Z4 型胀紧套规格参数表

-----上海乙谛精密机械有限公司-----产品规格表-----

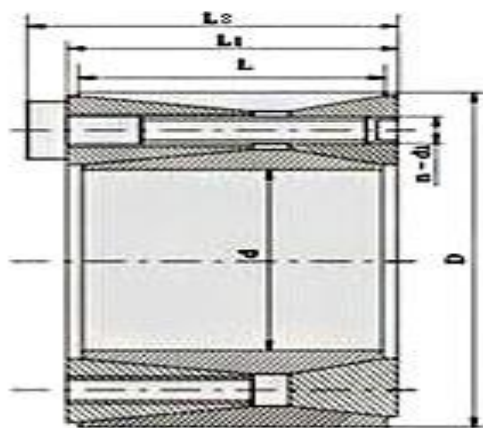


胀紧套基本尺寸								额定负荷		胀套与轴	胀套与轮	螺钉的	重量 kg
型 号	d	D	L	L1	L2	d1	n	轴向 力 F1 KN	转 矩 M 1KN·m	结合面上 的 压 力 Pf N/mm²	毂结合面 上的压力 Pf'N/mm²	拧 紧 力 矩 M AN·m	
	mm												
Z4-70X120	70	120	56	62	74	M12	8	197	6.85	201	117	145	3.3
Z4-80X130	80	130					12	291	11.65	263	162		3.7
Z4-90X140	90	140						290	13.00	234	150		4.0
Z4-100X160	100	160	74	80	94	M14	15	389	19.70	213	133	230	7.2
Z4-110X170	110	170						483	22.60	242	157		7.7
Z4-120X180	120	180						482	28.90	222	148		8.3
Z4-125X185	125	185						430	30.00	212	143		8.5
Z4-130X190	130	190						430	31.20	205	140		8.8
Z4-140X200	140	200				18	574	40.20	227	159	9.3		

Z4-150X210	150	210						572	42.90	212	152		10.0
Z4-160X230	160	230						800	64.00	227	158		14.9
Z4-170X240	170	240						795	67.80	214	152		15.7
Z4-180X250	180	250	88	94	110	M16	21	923	83.00	235	170	355	16.4
Z4-190X260	190	260						921	88.00	223	163		17.2
Z4-200X270	200	270					24	1050	105.00	242	179		18.8
Z4-210X290	210	290					20	1118	117.30	197	143		23.0
Z4-220X300	220	300					21	1120	123.00	189	138		27.7
Z4-240X320	240	320	110	116	134	M18	24	1280	153.00	198	148	485	29.8
Z4-250X330	250	330					27	1282	160.20	205	157		31.0
Z4-260X340	260	340						1430	186.00	210	157		32.0
Z4-280X370	280	370	130	136	156	M20	24	1650	230.00	192	145	690	46.0
Z4-300X390	300	390						1650	245.00	179	138		49.0
注：Z4 型胀紧联结套螺钉的机械性能等级为 12.9 级。													

Z5 型胀紧套规格参数表

-----上海乙谛精密机械有限公司-----产品规格表-----


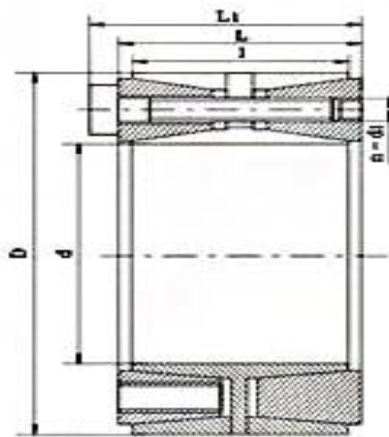


基本尺寸								额定负荷		Pf N/m ²	Pf' N/mm ²	MA N·m	重量 kg
型号	d	D	I	L	L 1	d1	n	轴 向 力 F1 KN	转 矩 M1 K N·m				
	mm												
Z5-100X145	100	145	60	65	77	M1 2	10	288	14.4	192	132	145	4.1
Z5-110X155	110	155							15.8	175	123		4.4
Z5-120X165	120	165							20.8	192	139		4.8
Z5-130X180	130	180	68	74	86	M1	15	433	28.1	193	139	145	6.5

Z5-140X190	140	190				2	18	519	36.3	214	157		7.0
Z5-150X200	150	200							39.0	200	150		7.4
Z5-160X210	160	210					21	606	48.5	219	167		7.8
Z5-170X225	170	225	75	81	95	M1	18	712	60.6	215	162	230	10.0
Z5-180X235	180	235				4			64.1	203	155		10.6
Z5-190X250	190	250	88	94	108		20	792	75.2	178	135		14.3
Z5-200X260	200	260					24	950	95.0	203	156		15.0
Z5-210X275	210	275					18	970	102.0	187	142	355	17.5
Z5-220X285	220	285						990	109.0	183	141		19.8
Z5-240X305	240	305	98	104	120	M1	24	1318	158.0	222	176		21.4
Z5-250X315	250	315				6		1340	167.5	215	170		22.0
Z5-260X325	260	325					25	1370	178.0		172		23.0
Z5-280X355	280	355	120	126	144	M1	24	1590	222.5	188	149	485	35.2
Z5-300X375	300	375				8		1650	248.0	183	146		37.4
Z5-320X405	320	405	135	142	162	M2	25	2140	344.0	192	152	690	51.3
Z5-340X425	340	425				0			365.0	181	144		54.1
Z5-360X455	360	455							480.0	176	139	930	75.4
Z5-380X475	380	475	158	165	187	M2		2670	508.0	166	133		79.0
Z5-400X495	400	495				2			535.0	158	128		82.8
Z5-420X515	420	515					30	3200	673.0	181	147		86.5
Z5-450X555	450	555						3700	832.5	175	142	1200	112.0
Z5-480X585	480	585	172	180	204	M2	32	3950	948.0		143		119.0
Z5-500X605	500	605				4			988.0	168	139		123.0
Z5-530X640	530	640	190	200	227	M2	30	4320	1145.0	157	130	1600	151.0

Z6 型胀紧套规格参数表

-----上海乙谛精密机械有限公司-----产品规格表-----

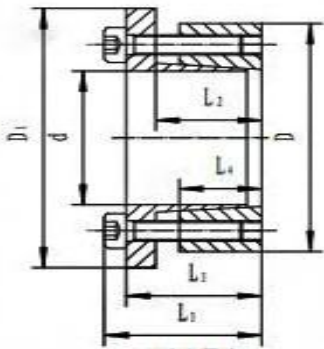

Z6 型胀紧套


d=14~50 M_k=0.127~1.830 KN·m

胀紧套基本尺寸								额定负荷		胀套与轴	胀套与轮	螺钉的拧 紧力矩 MA N·m	重 量 kg
型 号	d	D	I	L	L 1	d1	n	轴向力 F1 KN	转 矩 M1 KN·m	结合面上 的 压 力 Pf N/mm ²	毂结合面 上的压力 Pf' N/mm ²		
	mm												
Z6-14X55	14	55	17	30	22	62	38	18	127	M8	3	25	208
Z6-16X55	16	55	17	30	22	62	38	18	142	M8	3	25	181
Z6-18X55	18	55	17	30	22	62	38	18	157	M8	3	25	161
Z6-19X55	19	55	17	30	22	62	38	18	165	M8	3	25	152
Z6-20X55	20	55	17	30	22	62	38	18	172	M8	3	25	145
Z6-22X55	22	55	17	30	22	62	38	25.5	285	M8	3	35	186
Z6-24X55	24	55	17	30	22	62	38	25.5	307	M8	3	35	170
Z6-25X55	25	55	17	30	22	62	38	25.5	315	M8	3	35	163
Z6-28X55	28	55	17	30	22	62	38	31.5	435	M8	3	41	175
Z6-30X55	30	55	17	30	22	62	38	31.5	472	M8	3	41	163
Z6-24X65	24	65	17	30	22	72	38	37.4	440	M8	5	30	244
Z6-25X65	25	65	17	30	22	72	38	37.4	460	M8	5	30	234
Z6-28X65	28	65	17	30	22	72	38	43.6	600	M8	5	35	243
Z6-30X65	30	65	17	30	22	72	38	43.6	640	M8	5	35	227
Z6-32X65	32	65	17	30	22	72	38	43.6	690	M8	5	35	213
Z6-35X65	35	65	17	30	22	72	38	52.5	910		5	41	234

Z6-38X65	38	65	17	30	22	72	38	52.5	990	M8	5	41	216
Z6-40X65	40	65	17	30	22	72	38	52.5	1050	M8	5	41	205
Z6-30X80	30	80	20	33	25	87	41	52.4	780	M8	7	30	232
Z6-32X80	32	80	20	33	25	87	41	52.4	830	M8	7	30	217.5
Z6-35X80	35	80	20	33	25	87	41	61	1060	M8	7	35	232
Z6-38X80	38	80	20	33	25	87	41	61	1150	M8	7	35	214
Z6-40X80	40	80	20	33	25	87	41	61	1220	M8	7	35	203
Z6-42X80	42	80	20	33	25	87	41	73.5	1540	M8	7	41	233
Z6-45X80	45	80	20	33	25	87	41	73.5	1650	M8	7	41	217
Z6-48X80	48	80	20	33	25	87	41	73.5	1760		7	41	203
Z6-50X80	50	80	20	33	25	87	41	73.5	1830	M8	7	41	195
注：Z6 型胀紧联结套螺钉的机械性能等级为 12.9 级。													

Z7A 型胀紧套规格参数表

-----上海乙谛精密机械有限公司-----产品规格表-----

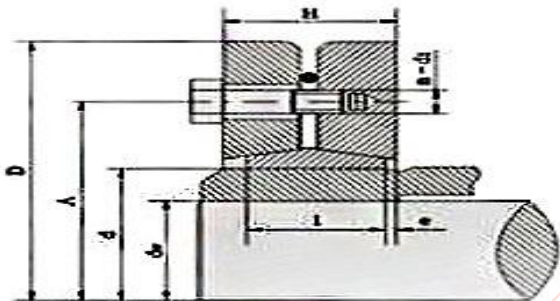



基 本 尺 寸							内六角螺钉		额定负荷		螺钉的	重 量 kg									
型号	d	D	dn	L	H	e	d1	n	轴向力 F1 KN	转 矩 M1 KN·m	拧 紧 力 矩 MA N·m										
	mm																				
Z7A-125X185	125	185	95 100 105	39	52	6	M10× 40	8	242	11.5	58	6									
Z7A-140X220	140	220	110 120 125						10	260 276 391			13 14.5 16	8							
			330 352							20 22											
			Z7A-155X245					155		245			12		385 427 464	25 28.8 32.5	10				
Z7A-165X260	165	260							46					62	8	M12× 50		10	474 507 538	32 32.5 39	14
																			Z7A-175X275	175	
			Z7A-185X295	185	295	155 160 165	46	62		8	M12× 50	12	632 662 691				49 53 57				
Z7A-195X315	195	315							165				56	72	M12×	15	800	66			27

			170				55		835	71		
			175						869	76		
Z7A-220X345	220	345	180	66	84	9	M16×65	9	978	88	240	35
			190						1063	101		
			200						1140	114		
			200						1200	120		
Z7A-240X370	240	370	210	72	92	10	M16×70	12	1276	134		44
			215						1312	141		
			220						1309	144		
Z7A-260X395	260	395	230						1384	159		
			235	84	104	10	M16×75	15	1421	167		48
			230						1478	170		
Z7A-280X425	280	425	240						1583	190		
			250						1680	210		
			250	106	11	M16×80	18	16	1704	213	470	60
Z7A-300X460	300	460	260						1800	234		
			270						1889	255		
			270						1955	264		
Z7A-320X495	320	495	280	12	136	12	M20×90	15	2036	285		75
			290						2076	301		
			290						2193	318		
Z7A-340X535	340	535	300						2300	345		
			305	132	158	13	M20×100	20	2354	359		84
			300						2547	382		
Z7A-360X555	360	555	310						2645	410		
			320						2738	438		
			330	144	178	13	M20×110	24	3091	510	470	125
Z7A-390X595	390	595	340						3194	543		
			350						3291	576		
			350						3371	590		
Z7A-420X630	420	630	360	158	188	13	M20×120	30	3500	630		156
			370						3620	670		
			390						3949	770		
Z7A-460X685	460	685	400						4300	860		
			410	178	208	13	M20×120	30	4634	950		185
			420						4881	1025		
Z7A-500X750	500	750	430						5233	1125		
			440						5568	1225		

注：Z7A 型胀紧联结套螺钉的机械性能等级为 10.9 级。

Z7B 型胀紧套规格参数表

-----上海乙谛精密机械有限公司-----产品规格表-----

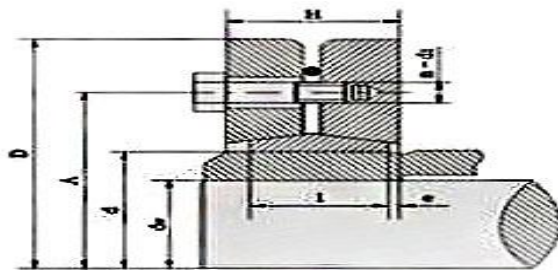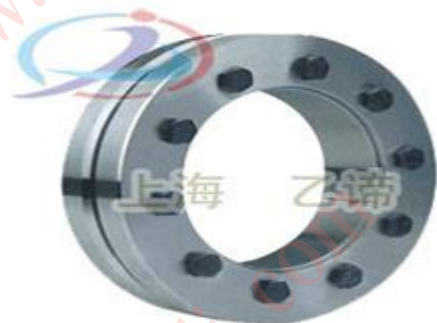

基 本 尺 寸							内六角螺钉		额定负荷		螺钉的拧 紧力矩 MA N·m	重 量 kg
型 号	d	D	dn	l	H	e	d1	n	轴向力	转 矩		
	mm						F1 KN		M1 KN·m			
Z7B-24X 50	24	50	19	14	18		M5X15	6	17	0.17	5	0.2
			20						21	0.21		
			23						0.25			
Z7B-30X 60	30	60	24	16	20	M5X18	25		0.3	0.3		
			25				27		0.34			
			26				29		0.38			
Z7B-30X 60	36	72	28	18	22	2	M6X20	5	31	0.44	12	0.4
			30						38,	0.57		
			31						40	0.63		
Z7B-44X 80	44	80	34	20	24	41			0.71	0.6		
			35			44			0.78			
			36			47			0.86			
Z7B-50X 90	50	90	38	22	26	M6X22	8	49	0.94	0.8		
			40					58	1.16			
			42					65	1.38			
Z7B-55X 100	55	100	42	23	29	3		M6X25	55		1.16	1.1
			45						67		1.52	
			48						78		1.88	
Z7B-62X	62	110	48					10 73	1.75		1.3	

110			50						80	2		
			52						86	2.25		
Z7B-68X 115	68	115	50						74	1.85		
			55						91	2.5		1.4
			60						105	3.15		
Z7B-75X 138	75	138	55						87	2.4		
			60						106	3.2		1.2
			65	25	31				121	3.95		
Z7B-80X 145	80	145	60					8	106	3.2		
			65						120	3.9		1.9
			70						131	4.6		
Z7B-90X 155	90	155	65						146	4.75	29	
			70	30	38	4		10	171	6		3.3
			75						193	7.25		
Z7B-100 X170	100	170	70						171	6		
			75	34	43	4.5	M8X35	12	200	7.5		4.7
			80						225	9		
Z7B-110 X185	110	185	75						192	7.2		
			80	39	49	5		10	225	9		5.9
			85				M10X4		254	10.8		
Z7B-125 X215	125	215	85				0		258	11	58	
			90	42	53	5.5		12	288	13		8.3
			95						315	15		
Z7B-140 X230	140	230	95						317	15.1		
			100	46	58		M12×4	10	352	17.6		10
			105				5		382	20.1		
Z7B-155 X263	155	263	105						419	22	100	
			110	50	62		M12×5	12	454	25		15
			115				0		487	28		
Z7B-165 X290	165	290	115						539	31		
			120						583	35		
			125	56	68		M16×5	8	624	39		22
Z7B-175 X300	175	300	125				5		640	40		
			130						677	44		
			135						711	48		
Z7B-185 X330	185	330	135	71	85	8	M16×6	10	815	55		37
			140				5		857	60		



			145						896	65		
Z7B-195	19		140						928	65		
X350	5	350	150						1013	76		
			155						1052	81.5		
Z7B-200	20		150					12	1040	78		41
X350	0	350	155						1084	84		
			160						1125	90		
Z7B-220	22		160		10		M16×7		1250	100		
X370	0	370	165	88	3		5	15	1309	108		54
			170						1365	116		
Z7B-240	24		170		10		M20×8		1412	120		
X405	0	405	180	92	7	10	0	12	1533	138		67
			190						1642	156		
Z7B-260	26		190		10		M20×8		1726	164		
X430	0	430	200	10	11		5	12	1840	184		82
			210	3	9				1943	204		
Z7B-280	28		210		11		M20×9		2062	217		
X460	0	460	220	11	13		5	15	2227	245		102
			230	4	2				2374	273		
Z7B-300	30		230						2278	262		
X485	0	485	240				M20×1	16	2442	293	470	118
			245	12	14		00		2514	308		
Z7B-320	32		240	2	0				2550	306		
X520	0	520	250					18	2720	340		131
			260						2877	374		
Z7B-340	34		250		13				3152	394		
X570	0	570	260	13	15	12			3308	430		186
			270	4	5				3452	466		
Z7B-350	35		270				M20×1		3393	458		
X590	0	590	280				10	24	3572	500		
			285	14	15				3656	521		
Z7B-360	36		280		0				3622	507		
X590	0	590	290		9				3793	550		204
			295						3878	572		
Z7B-380	38	645	290				M24×1		4069	590		
X645	0	300	4267	14	16		20	18	640		820	239
		310	4452	4	3				690			

Z7B-390 X660	39 0	660	300 310 320					20	4400 4580 4750	660 710 760		260
Z7B-420 X690	42 0	690	330 340 350	16 4	18 4			20	4727 4940 5143	780 840 900		316
Z7B-440 X750	44 0	750	340 350 360				M24×1 30	24	5235 5486 5722	890 960 1030	820	408
Z7B-460 X770	46 0	770	360 370 380	2	2				5556 5784 6000	1000 1070 1140		420
Z7B-480 X800	48 0	800	380 390 400	18 8	21 3		M24×1 40	28	6316 6513 6700	1200 1270 1340		505
Z7B-500 X850	50 0	850	400 410 420	18 8	21 3		M24×1 50	24	7200 7415 7619	1440 1520 1600		575
Z7B-530 X910	53 0	910	430 440 450			15			8465 8818 9156	1820 1940 2060		746
Z7B-560 X940	56 0	940	450 460 470	3	8		M27×1 60	30	8889 9261 9617	2000 2130 2260	1100	775
Z7B-590 X980	59 0	980	470 480 490	22 8	26 0		M27×1 70	36	9574 10000 10410	2250 2400 2550		900
Z7B-620 X1020	62 0	1020	500 510 520	25 4	28 6				10800 11220 11620	2700 2860 3020		1080
Z7B-660 X1070	66 0	1070	530 540 550			18	M30×1 90	30	11700 12150 12580	3100 3280 3460	1640	1190
Z7B-700 X1180	70 0	1180	560 575 590	26 0	29 2			36	12320 12870 13390	3450 3700 3950		1515
Z7B-750	75	125	600	27	31		M30×2	40	14670	4400	1640	1785

X1250	0	0	615	8	0		00		15280	4700		
			630						15870	5000		
Z7B-800	80	137	645	29	33		M30×2	45	16740	5400		
X1370	0	0	660	6	4		10		17420	5750		2390
			670			20			18070	6100		
Z7B-900	90	148	720	33	37		M33×2	40	20000	7200		
X1480	0	0	740	2	0		40		20950	7750	2200	2930
			760						21840	8300		
注：Z7B 型胀紧联结套螺钉的机械性能等级为 10.9 级。												

Z7C 型胀紧套规格参数表

-----上海乙谛精密机械有限公司-----产品规格表-----

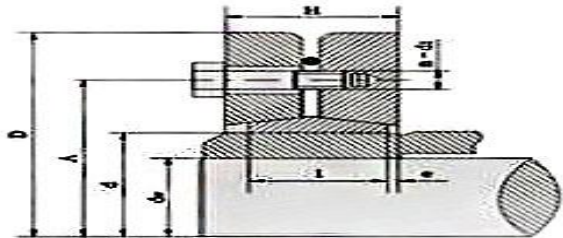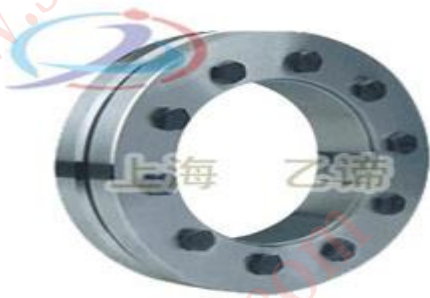


基 本 尺 寸							内六角螺钉		额定负荷		螺钉的 重 量	
型 号	d	D	dn	l	H	e	d1	n	轴向力 F1	转 矩	拧 紧	kg
									KN	M1 KN·m	力 矩 MA N·m	
Z7C-140X230	140	230	95	60	74	7	M12×55	12	436	20.7	100	13
			100						480	24.0		
			105						518	27.2		
Z7C-155X263	155	263	105	66	80		M12×60	15	545	28.6		20
			110						591	32.5		
			115						633	36.4		
Z7C-165X290	165	290	115	72	88	8	M16×65	10	701	40.3	240	26
			120						758	45.5		
			125						811	50.7		
Z7C-175X300	175	300	125						832	52		29
			130						880	57.2		
			135						924	62.4		
Z7C-185X330	185	330	135	92	112	10	M16×80	15	1037	70		47
			140						1100	77		
			145						1159	84		
Z7C-200X350	200	350	145						1291	93		50
			150						1353	101.5		
			155						1409	109.2		
Z7C-220X370	220	370	160	114	134		M16×90	20	1625	130	240	65

			165						1703	140.5		
			170						1776	151		
Z7C-240X405	240	405	170	120	144	12	M20×100	15	1835	156	470	87
			180						1994	179.5		
			190						2137	203		
Z7C-260X430	260	430	190	136	160		M20×110	16	2242	213		100
			200						2390	239		
			210						2542	265		
Z7C-280X460	280	460	210	148	172		M20×110	20	2686	282		132
			220						2900	319		
			230						3087	355		
Z7C-300X485	300	485	230	152	176		M20×120		2965	341		140
			240						3175	381		
			245						3273	401		
Z7C-320X520	320	520	240	160	184		M20×130	24	3317	398		165
			250						3536	442		
			260						3738	486		
Z7C-340X570	340	570	250	176	200		M24×130	20	4080	510	820	240
			260						4307	560		
			270						4519	610		
Z7C-360X590	360	590	280	180	204		M24×140		4707	659		250
			290						4931	715		
			295						5044	744		
Z7C-390X660	390	660	300	188	212		M24×140	24	5733	860		350
			310						5903	915		
			320						6063	970		
Z7C-420X690	420	690	330	214	238		M24×150	28	6182	1020		410
			340						6470	1100		
			350						6743	1180		
Z7C-460X770	460	770	360	224	252	14	M27×170	24	7222	1300	1210	540
			370						7514	1390		
			380						7789	1480		
Z7C-500X850	500	850	400	246	274		M27×180	30	9400	1880		750
			410						9659	1980		
			420						9905	2080		

注：Z7C 型胀紧联结套螺钉的机械性能等级为 10.9 级。

Z8 型胀紧套规格参数表

-----上海乙谛精密机械有限公司-----产品规格表-----

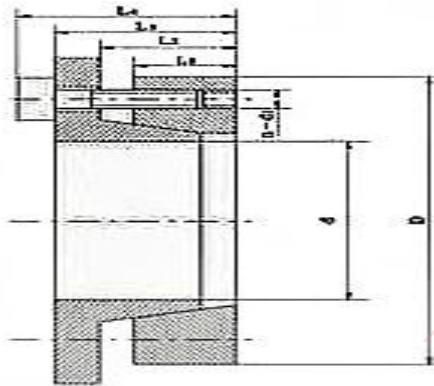

基本尺寸							内六角螺钉		额定负荷		Pf N/m ²	Pf' N/m ²	螺钉 的 拧紧 力矩 MA N·m	重量 kg
型号	d	D	L	L0	L1	L2	d1	n	轴 向 力 F1 KN	转 矩 M1 KN·m				
	mm													
Z8-20X47	20	47	17	22	28	34	M6×2 0	5	30	0.29	220	95	17	0.25
Z8-22X47	22	47	17	22	28	34	M6×2 0	5	30	0.32	200	95		0.25
Z8-24X50	24	50	17	22	28	34	M6×2 0	5	30	0.37	200	95		0.27
Z8-25X50	25	50	17	22	28	34	M6×2 0	6	36	0.45	215	110		0.27
Z8-28X55	28	55	17	22	28	34	M6×2 0	6	36	0.50	200	100		0.32
Z8-30X55	30	55	17	22	28	34	M6×2 0	6	36	0.54	190	100		0.35
Z8-32X60	32	60	17	22	28	34	M6×2 0	8	48	0.77	215	115		0.37
Z8-35X60	35	60	17	22	28	34	M6×2 0	8	48	0.84	190	110		0.34


Z8-38X65	38	65	17	22	28	34	M6×2 0	8	48	0.91	195	115		0.40
Z8-40X65	40	65	17	22	28	34	M6×2 0	8	48	0.96	190	105		0.38
Z8-45X75	45	75	20	25	33	41	M8×2 5	7	77	1.75	230	135	41	0.63
Z8-50X80	50	80	20	25	33	41	M8×2 5	7	77	1.93	210	130		0.68
Z8-55X85	55	85	20	25	33	41	M8×2 5	8	88	2.45	215	135		0.73
Z8-60X90	60	90	20	25	33	41	M8×2 5	8	88	2.70	190	125		0.78
Z8-63X95	63	95	20	25	33	41	M8×2 5	9	100	3.18	205	140		0.89
Z8-65X95	65	95	20	25	28	41	M8×2 5	9	100	3.25	200	135		0.83
Z8-70X110	70	110	24	30	40	50	M10×30	8	141	5.00	220	140	83	1.33
Z8-75X115	75	115	24	30	40	50	M10×30	8	141	5.25	200	130		1.40
Z8-80X120	80	120	24	30	40	50	M10×30	8	141	5.60	190	125		1.48
Z8-85X125	85	125	24	30	40	50	M10×30	9	159	6.75	200	135		1.55
Z8-90X130	90	130	24	30	40	50	M10×30	9	159	7.10	190	130		1.63
Z8-95X135	95	135	24	30	40	50	M10×30	10	176	8.35	200	140		1.70
Z8-100X145	100	145	26	32	44	56	M12×30	8	205	10.30	210	145	145	2.60
Z8-110X155	110	155	26	32	44	56	M12×30	8	205	11.25	190	135		2.80
Z8-120X165	120	165	26	32	44	56	M12×30	9	231	13.9	210	145		3.00
Z8-130X180	130	180	34	40	52	64	M12×30	12	308	20.00	190	140		4.60
Z8-140X190	140	190	34	40	54	68	M14×40	9	317	22.25	180	130	230	4.90
Z8-150X200	150	200	34	40	54	68	M14×40	10	352	26.3	190	140		5.20
Z8-160X210	160	210	34	40	54	68	M14×40	11	287	31.0	190	145		5.50
Z8-170X225	170	225	44	40	64	78	M14×40	12	422	35.9	150	115		7.75

Z8-180X23 5	180	23 5	44	50	64	78	M14× 40	12	422	38.0	145	110		8.15
Z8-190X25 0	190	25 0	44	50	64	78	M14× 40	15	528	50.1	170	130		9.50
Z8-200X26 0	200	26 0	44	50	64	78	M14× 40	15	528	52.8	160	125		9.90
Z8-220X28 5	220	28 5	50	56	72	88	M16× 40	12	587	64.5	145	110	355	13.40
Z8-240X30 5	240	30 5	50	56	72	88	M16× 40	15	734	88	165	130		14.30
Z8-260X32 5	260	32 5	50	56	72	88	M16× 40	18	880	114	180	145		15.50
Z8-280X35 5	280	35 5	60	66	84	102	M18× 50	16	948	132	150	120	485	22.90
Z8-300X37 5	300	37 5	60	66	84	102	M18× 50	18	105 9	159	160	125		24.40
Z8-320X40 5	320	40 5	74	81	101	121	M20× 50	18	137 4	220	150	120	690	36.10
Z8-340X42 5	340	42 5	74	81	101	121	M20× 50	21	160 3	272.5	175	135		38.40
Z8-360X45 5	360	45 5	86	94	116	138	M22× 60	18	171 0	308	140	110	930	46.20
Z8-380X47 5	380	47 5	86	94	116	138	M22× 60	21	199 5	379	155	125		55.00
Z8-400X49 5	400	49 5	86	94	116	138	M22× 60	21	199 5	399	150	120		61.00

注：Z8 型胀紧联结套螺钉的机械性能等级为 12.9 级。

Z9 型胀紧套规格参数表

-----上海乙谛精密机械有限公司-----产品规格表-----

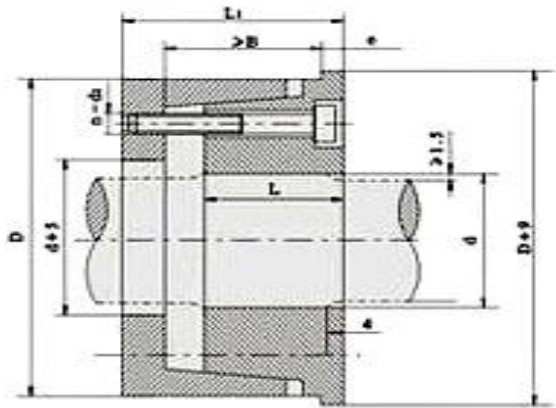



胀紧套基本尺寸							内六角螺 钉		额定负荷		胀套与 轴 结合面 上 的压 力 Pf N/mm ²	胀套与 轮 毂结合 面上的 压力 Pf' N/mm ²	螺钉的 拧紧 力矩 MA N·m	重 量 kg
型 号	d	D	L	L1	e	B	d1	n	轴向 力 F1 KN	转矩 M1 K N·m				
	mm													
Z9-100X145	100	145	54	75	5	65	M12× 60	8	192	9.6	102	70	145	4.7
Z9-110X155	110	155	54	75	5	65	M12× 60	8	191	10.5	93	66	145	5.1
Z9-120X165	120	165	54	75	5	65	M12× 60	9	216	13	96	70	145	5.5
Z9-130X180	130	180	63	84	6	72	M12× 70	12	287	17.8	100	78	145	7.5
Z9-140X190	140	190	63	84	6	72	M12× 70	12	287	20.2	94	69	145	7.9
Z9-150X200	150	200	63	84	6	72	M12× 70	12	287	21.6	88	66	145	8.4

Z9-160X210	160	210	63	84	6	72	M12× 70	15	360	28.8	101	77	145	8.9
Z9-170X225	170	225	63	84	6	72	M12× 70	16	383	32.6	101	76	145	10.5
Z9-180X235	180	235	63	84	6	72	M12× 70	18	431	38.8	108	82	145	11.0
Z9-190X250	190	250	69	94	6	81	M14× 75	15	493	46.8	106	80	230	14.3
Z9-200X260	200	260	69	94	6	81	M14× 75	16	526	52.8	100	77	230	15.0
Z9-220X285	220	285	69	94	6	81	M16× 75	14	640	70	119	92	355	17.8
Z9-240X305	240	305	86	112	7	98	M16× 90	16	731	88	96	75	355	23.2
Z9-260X325	260	325	86	112	7	98	M16× 90	18	822	107	103	82	355	24.8
Z9-280X365	280	355	94	120	8	106	M16× 100	20	910	128	96	75	355	33
Z9-300X375	300	375	94	120	8	106	M16× 100	22	1000	151	99	79	355	36
Z9-320X405	320	405	109	142	8	125	M20× 120	18	1280	206	101	80	690	52
Z9-340X425	340	425	109	142	8	125	M20× 120	20	1420	242	106	85	690	54
Z9-360X455	360	455	120	159	8	140	M22× 130	20	1770	319	113	89	930	72
Z9-380X475	380	475	120	159	8	140	M22× 130	20	1770	337	109	87	930	75
Z9-400X485	400	485	120	159	8	140	M22× 130	20	1770	355	101	83	930	79
Z9-420X515	420	515	120	159	8	140	M22× 130	22	1980	410	107	87	930	82

注：Z9 型胀紧联结套螺钉的机械性能等级为 12.9 级。

Z10 型胀紧套规格参数表

-----上海乙谛精密机械有限公司-----产品规格表-----

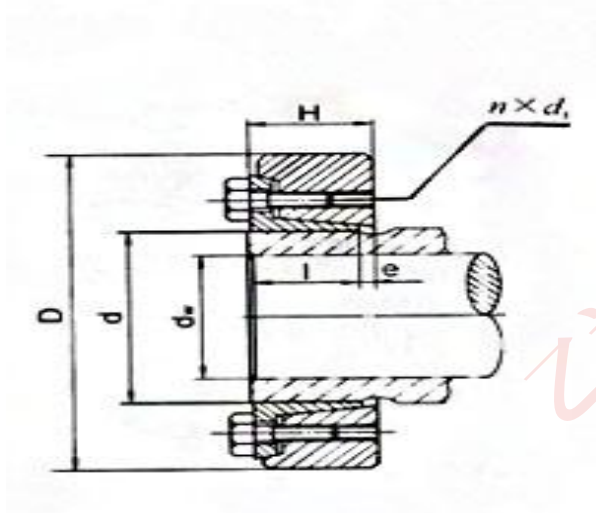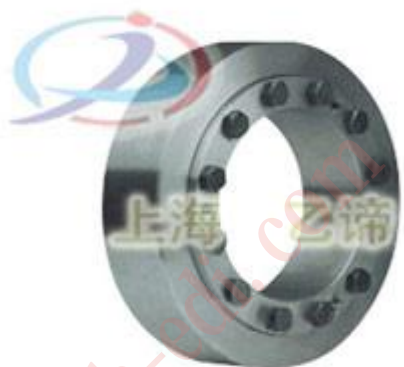

基本尺寸							内六角 螺钉	额定负荷		螺钉的 拧紧 力矩	重量
型 号	d	D	dn	l	H	e	d1	轴向力 F1 KN	转 矩 M1 KN·m	MA N·m	kg
	mm										
Z10-12X32	12	32	10	9	11	1	M5×8	8	0.038	5	0.06
Z10-14X37	14	37	12					9	0.052		0.08
Z10-16X41	16	41	14	12	15	1.5	M5×1 2	13	0.090		0.12
Z10-18X44	18	44	15					10	0.080		
			16					14	0.112		
Z10-20X47	20	47	17					16	0.140		0.15
			18					20	0.184		

Z10-24X50	24	50	19	14	18	2		17	0.160	12	0.2	
			20					20	0.200			
			22					25	0.280			
Z10-30X60	30	60	24	16	20			23	0.28		0.3	
			25					25	0.32			
			26					27	0.36			
Z10-36X72	36	72	28	18	22			37	0.55		0.4	
			30					43	0.68			
			31					46	0.74			
Z10-44X80	44	80	34	20	24			41	0.70		0.6	
			35					44	0.77			
			36					47	0.85			
Z10-50X90	50	90	38	22	26	2.5	M6×1 6	55	1.10	12	0.8	
			40			64		1.32				
			42			72		1.54				
Z10-55X100	55	100	42	23	29	3		54	1.13		1.1	
			45					66	1.50			
			48					77	1.85			
Z10-62X110	62	110	48					69	1.60			1.3
			50					77	1.92			
			52					84	2.17			
Z10-68X115	68	115	50					73	1.80		1.4	

			55					90	2.44		
			60					103	3.10		
Z10-75X138	75	138	55					97	2.70		1.7
			60					117	3.52		
			65	25	31			133	4.30		
Z10-80X145	80	145	60					108	3.25		1.9
			65					121	3.97		
			70					133	4.70		
Z10-90X155	90		65			4	M8×2	145	4.70	29	
(85)	(85)	155	70	30	38		5	170	5.98		3.3
			75					190	7.20		
Z10-100X170	100		70					170	5.91		
(95)	(95)	170	75	34	43			200	7.42		4.7
			80					220	8.90		
Z10-110X185	110		80					226	9.05		
(105)	(105)	185	85	39	40	5		255	10.38		5.9
			90				M10×	280	12.60		
Z10-125X215	125		90				30	280	12.85	58	
(120,130)	(120,130)	215	95	42	53	5.5		315	14.98		8.3
			100					340	17.00		
Z10-140X230	140		100				M12×	370	18.50		
(135)	(135)	230	105	46	58	6	35	400	21.10	100	10

			110					431	23.70		
Z10-155X263 (160)	155 (160)	263	110	50	62			440	24.0		15
	115		473					27.0			
	120		508					30.2			
Z10-165X290 (170)	165 (170)	290	120	56	68	7	M16× 40	525	34.5	240	22
			125					620	38.6		
			130					660	42.8		
Z10-175X300 (180)	175 (180)	300	130	56	68		40	650	42.0	240	22
			135					680	46.2		
			140					720	50.6		
Z10-185X330 (185,190)	185 (185,190)	330	140	71	85	8	M16× 40	870	61.0	240	37
			145					910	66.2		
			150					960	71.7		
Z10-200X350 (195)	200 (195)	350	150	71	85		40	1020	77	240	41
			155					1070	82.7		
			160					1100	88.1		
Z10-220X370 (210)	220 (210)	370	160	88	103	9	M16× 50	1210	97	240	54
			165					1270	105		
			170					1335	113.5		
Z10-240X405 (230)	240 (230)	405	170	92	107	10	M20× 60	1390	118	470	67
			180					1515	136		


			190			12	M20×70	1630	154.8	820	250
Z10-260X430 (250)	260 (250)	430	190	10 3	119			1700	162		
			200					1820	182		
			210					1930	202.8		
			2030					213			
Z10-280X460 (270)	280 (270)	460	210	11 4	132			2150	240		
			220					2330	269		
			230					2280	262		
Z10-300X485 (290)	300 (290)	485	230	12	140			2450	294		
			240					2530	310		
			245					2510	301		
Z10-320X520 (310)	320 (310)	520	240	2				2682	335		
			250					2850	370		
			260								
Z10-340X570 (330)	340 (330)	570	250	13 4	155			3120	389		
			260					3300	426		
			270					3430	463		
Z10-360X590 (350)	360 (350)	590	280	14 0	159			3800	532		
			290					3970	575		
			300			3990	599				
Z10-390X650 (380)	390 (380)	650	300	14 4	163	14	M24×80	4260	640		
			310					4400	690		
			320					4640	742		

Z10-420X670 (400)	420 (400)	670	330	16 4	184			4770	787		300
			340					5000	846		
			350					5200	910		
Z10-440X740 (430)	440 (430)	740	340	17	192			5500	935		400
			350					5720	1000		
			360					6000	1060		
Z10-460X770 (450)	460 (450)	770	360	2				6050	1090		420
			370					6200	1150		
			380					6500	1235		
Z10-480X800 (470)	480 (470)	800	380	18	213	15	M24× 90	6560	1280		500
			390					6750	1350		
			400					6940	1420		
Z10-500X850 (490)	500 (490)	850	400	8			M27× 90	7500	1480		570
			410					7720	1600		
			420					7920	1720		
Z10-530X910 (520)	530 (520)	910	430	21	238	17	M27× 100	8470	1880	1210	740
			440					9000	2000		
			450					9250	2120		
Z10-560X940 (550)	560 (550)	940	450	3				8950	2020		770
			460					9350	2150		
			470					9700	2280		
Z10-590X980	590	980	470	22	260	18		10600	2500		900

(580)	(580)		480	8				11000	2650		
			490					11450	2800		
Z10-620X1020 (610)	620 (610)	102	500	25	286		M30× 110	11000	2740	1640	1080
			510					11300	2900		
		0	520	4				11900	3100		

Z11 型胀紧套规格参数表

上海乙谛精密机械有限公司 产品规格表

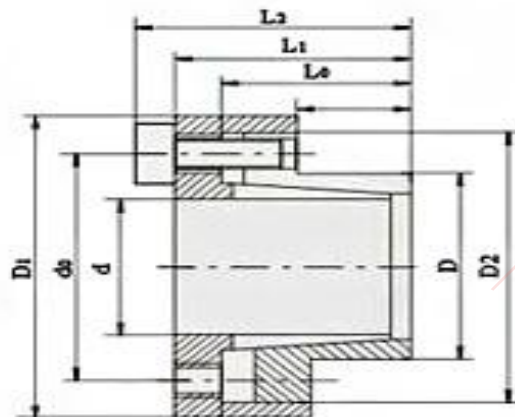

胀紧套规格 格 sizes d×D	胀紧套基本尺寸 fundamental dimensions						内六角螺钉 internal hexagon		额定负荷 rated load		Pf (N/m ²)	MA (N.m)	G (kg)
	L	L0	L1	L2	D1	D2	规格 sizes	数量 QTY	Ft (KN)	Mt (KN.m)			
	mm												
12×18	14	23	26	30	32	28	M4×10	4	10.0	0.058	105	5	0.08
13×23	14	23	26	30	38	34	M4×10	4	10.0	0.063	80	5	0.13
14×23	14	23	26	30	38	34	M4×10	4	10.0	0.068	80	5	0.13
15×24	16	29	36	42	45	40	M6×18	4	17.0	0.127	115	17	0.26
16×24	16	29	36	42	45	40	M6×18	4	17.0	0.136	115	17	0.26
17×26	18	31	38	44	47	42	M6×18	4	21.6	0.180	125	17	0.27
18×26	18	31	38	44	47	42	M6×18	4	21.6	0.196	126	17	0.27
19×27	18	31	38	44	49	45	M6×18	4	21.6	0.206	122	17	0.29
20×28	18	31	38	44	50	44	M6×18	4	21.6	0.216	118	17	0.30
22×32	25	38	45	51	54	48	M6×18	4	21.6	0.245	74	17	0.38
24×34	25	38	45	51	56	50	M6×18	4	21.6	0.265	70	17	0.41
25×34	25	38	45	51	56	50	M6×18	4	21.6	0.274	70	17	0.45
28×39	25	38	45	51	61	55	M6×18	6	32.3	0.461	91	17	0.47
30×41	25	45	45	51	62	57	M6×18	6	32.3	0.500	86	17	0.48
32×43	25	45	45	51	65	59	M6×18	6	32.3	0.529	82	17	0.52
35×47	32	45	52	58	69	62	M6×18	8	44.1	0.774	78	17	0.63
38×50	32	45	52	58	72	66	M6×18	8	44.1	0.843	74	17	0.67

40×53	32	45	52	58	75	69	M6×18	8	44.1	0.882	70	17	0.73
42×55	32	45	52	58	78	71	M6×18	8	44.1	0.931	68	17	0.78
45×59	45	62	70	78	86	80	M8×22	8	82.3	1.850	82	41	1.23
48×62	45	62	70	78	87	81	M8×22	8	82.3	1.970	78	41	1.24
50×65	45	62	70	78	92	86	M8×22	8	82.3	2.060	74	41	1.40
55×71	55	72	80	88	98	92	M8×22	9	92.1	2.550	63	41	1.70
60×77	55	72	80	88	104	98	M8×22	9	92.1	2.770	58	41	1.90
65×84	55	72	80	88	111	105	M8×22	9	92.1	3.010	53	41	2.21
70×90	65	86	96	106	119	113	M10×25	9	147	5.150	67	83	3.05
75×95	65	86	96	106	126	119	M10×25	9	147	5.490	63	83	3.32
80×100	65	86	96	106	131	125	M10×25	12	196	7.840	79	83	3.50
85×106	65	86	96	106	137	131	M10×25	12	196	8.330	75	83	3.81


注：Z11 型胀紧联结套螺钉的机械性能等级为 12.9 级。

Z12A 型胀紧套规格参数表

-----上海乙谛精密机械有限公司-----产品规格表-----



Z12型胀紧套

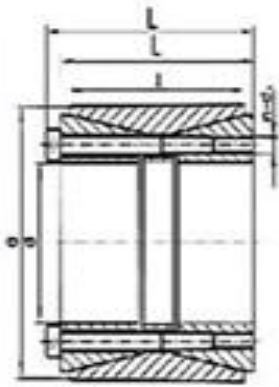

(图纸)

基 本 尺 寸						内六角 螺钉		额定负荷		胀套 与轴 结 合面 上的 压力 Pf N/m ²	胀套 与轮 毂 结合 面上的 压力 Pf' N/m ²	螺钉的 拧紧 力矩 MA N·m	重量 kg
型 号	d	D	I	L	L1	d1	n	轴向 力 F1 KN	转 矩 M1 KN·m				
	mm												
Z12A-25X55	25	55	32	40	46	M6	6	67	0.84	297	101	17	0.47
Z12A-28X55	28								0.94	265	101		0.44
Z12A-30X55	30								1.0	248	101		0.42
Z12A-35X60	35	60	44	54	60	M8	7	74	1.3	165	87	41	1.0
Z12A-40X75	40	75	44	54	62			145	2.9	282	116		1.1
Z12A-45X75	45	75	44	54	62		8	145	3.26	251	116		1.2
Z12A-50X80	50	80	56	64	72			165	4.15	200	98		1.4
Z12A-55X85	55	85						186	5.15	205	104		1.6
Z12A-60X90	60	90					10	207	6.2	202	106		1.7

Z12A-65X95	65	95					10	207	6.75	187	100		1.9
Z12A-70X110	70	110	70	78	88	M10	10	329	11.5	223	114	83	3.1
Z12A-80X120	80	120					11	362	14.5	215	115		3.5
Z12A-90X130	90	130					12	390	17.8	208	115		3.8
Z12A-100X145	100	145	90	100	112	M12	14	527	26.3	200	107	145	6.1
Z12A-110X155	110	155					17	575	31.8	198	110		6.6
Z12A-120X165	120	165					18	670	40.4	212	120		7.2
Z12A-130X180	130	180	104	116	130	M14	16	759	49	180	112	230	11.1
Z12A-140X190	140	190					18	842.8	59	186	124		11.8
Z12A-150X200	150	200					19	896.6	67	185	127		12.6
Z12A-160X210	160	210					20	950	76	183	128		13.4
Z12A-170X225	170	225	134	146	162	M16	19	1223.5	104	172	113	355	19.6
Z12A-180X235	180	235					20	1288.8	116	172	115		20.6
Z12A-190X250	190	250					21	1363	129.5	172	116		23.8
Z12A-200X260	200	260					22	1437.5	143.7	172	112		24.9
Z12A-220X285	220	285					24	1581.8	174	172	115		29.6
Z12A-240X305	240	305					26	1725	207	172	119		31.9
Z12A-260X325	260	325					28	1846	240	170	117		34.3
Z12A-280X355	280	355	165	177	197	M20	24	2428.5	340	168	117	690	52
Z12A-300X375	300	375					25	2540	381	161	123		55.3
Z12A-320X405	320	405					28	2881	461	175	119		67.3
Z12A-340X425	340	425					29	2994	509	171	119		71
Z12A-360X455	360	455	190	202	224	M22	28	3588.8	646	169	115	930	96.5
Z12A-380X475	380	475					30	3821	726	170	115		101.2
Z12A-400X495	400	495					31	3960	792	168	120		106
Z12A-420X515	420	515					32	4100	861	165	116		110.7
Z12A-440X535	440	535					24	4260	937	165	112		110
Z12A-460X555	460	555					24	4260	980	158	107		113
Z12A-480X575	480	575					28	5000	1200	176	121		118
Z12A-500X595	500	595					28	5000	1240	169	117		122
Z12A-520X615	520	615					30	5330	1390	174	121		126
Z12A-540X635	540	635					30	5330	1440	168	117		131
Z12A-560X655	560	655					32	5680	1590	172	121		135


Z12A-580X675	580	675					33	5860	1705	172	121		140
Z12A-600X695	600	695					33	5860	1760	166	118		144
注：Z12A 型胀紧联结套螺钉的机械性能等级为 12.9 级。													

Z12B 型胀紧套规格参数表

-----上海乙谛精密机械有限公司-----产品规格表-----



Z12型胀紧套

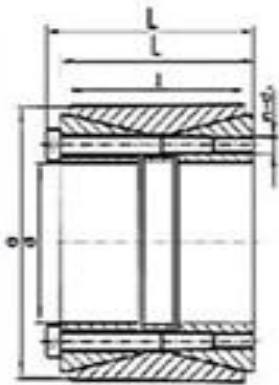

(图纸)

胀紧套基本尺寸 (mm) Dimensions						内六角 螺钉		额定负荷		胀套与 轴 结合面 上的 压力 Pf N/mm ²	胀套与 轮载 结合面 上的 压力 Pf' N/mm ²	螺钉 的 拧紧 力矩 MA N·m	重量 kg
型 号	d	D	I	L	L1	d1	n	轴向 力 Ft kN	转矩 Mt k N. m				
Z12B-70X110	70	110	50	60	70	M10	8	204	7.15	194	107	83	2.3
Z12B-80X120	80	120					10	250	10.25	212	123		2.5
Z12B-90X130	90	130					11	280	12.6	207	125		2.7
Z12B-100X145	100	145	60	70	82	M12	10	372	18.6	205	126	145	4.1
Z12B-110X155	110	155					10	372	20.5	187	118		4.4
Z12B-120X165	120	165					11	408	24.5	188	122		4.8

Z12B-130X180	130	180	65	79	91		14	520	33.8	197	128	6.3
Z12B-140X190	140	190					15	557	39.0	196	130	6.6
Z12B-150X200	150	200					15	557	41.8	183	123	7.8
Z12B-160X210	160	210					16	593	47.5	183	125	9.4
Z12B-170X225	170	225	78	92	10	M14	15	764	65.0	193	133	10.7
Z12B-180X235	180	235			6		15	765	69.0	182	127	11.3
Z12B-190X250	190	250	88	10	11		16	815	77.5	163	103	14.6
Z12B-200X260	200	260		2	6		20	1020	102	194	124	15.3
Z12B-220X285	220	285	96	10	12	M16	15	1060	117	174	113	20.2
Z12B-240X305	240	305					20	1410	170	212	140	21.8
Z12B-260X325	260	325					21	1480	193	205	138	23.4
Z12B-280X355	280	355		11	13	M20	15	1650	232	213	141	30.0
Z12B-300X375	300	375		0	0		15	1650	249	198	134	31.2
Z12B-320X405	320	405		12	13		20	2210	354	191	125	48.0
Z12B-340X425	340, 425	425		4	6		20	2210	376	180	119	51.0
Z12B-360X455	360	455	14	15	17	M22	20	2750	496	185	118	69.0
Z12B-380X475	380	475					20	2750	524	175	113	73.0
Z12B-400X495	400	495					22	3010	602	183	122	76.0
Z12B-420X515	420	515					24	3300	694	190	127	80.0
Z12B-440X535	440	535					24	3300	728	166	123	81
Z12B-460X555	460	555					24	3300	760	159	118	85
Z12B-480X575	480	575					25	3440	830	159	119	88


Z12B-500X595	500	595					25	3440	861	153	115	91
Z12B-520X615	520	615					28	3850	1003	164	124	95
Z12B-540X635	540	635					28	3850	1042	158	120	98
Z12B-560X655	560	655					30	4130	1157	163	125	101
Z12B-580X675	580	675					30	4130	1190	158	121	104
Z12B-600X695	600	695					30	4130	1240	153	118	108

Z12C 型胀紧套规格参数表

-----上海乙谛精密机械有限公司-----产品规格表-----



Z12型胀紧套

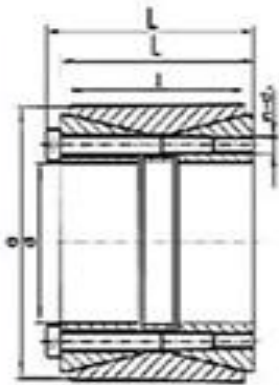

(图纸)

胀紧套基本尺寸							内六角螺钉		额定负荷		螺钉的拧紧力矩	重量
型 号	d	D	dn	l	H	e	d1	n	轴向力 F1 KN	转 矩 M1 KN·m	力 矩 MA N·m	kg
	mm											
Z12C-140X230	140	230	95	60	74	7	M12×55	12	436	20.7	100	13
			100						480	24.0		
			105						518	27.2		
Z12C-155X163	155	263	105	66	80	7	M12×60	15	545	28.6	100	20
			110						591	32.5		
			115						633	36.4		
Z12C-165X290	165	290	115	72	88	8	M16×65	10	701	40.3	240	26
			120						758	45.5		
			125						811	50.7		
Z12C-175X300	175	300	125	72	88	8	M16×65	10	832	52	240	29
			130						880	57.2		
			135						924	62.4		
Z12C-185X330	185	330	135	92	112	10	M16×80	15	1037	70	240	47
			140						1100	77		
			145						1159	84		
Z12C-200X350	200	350	145	92	112	10	M16×80	15	1291	93	240	50
			150						1353	101.5		


			155						1409	109.2		
Z12C-220X370	220	370	160	11 4	134		M16× 90	20	1625	130	240	65
			165						1703	140.5		
			170						1776	151		
Z12C-240X405	240	405	170	12 0	144		M20× 100	15	1835	156	470	87
			180						1994	179.5		
			190						2137	203		
Z12C-260X430	260	430	190	13 6	160		M20× 110	16	2242	213		100
			200						2390	239		
			210						2542	265		
Z12C-280X460	280	460	210	14 8	172		M20× 110	20	2686	282		132
			220						2900	319		
			230						3087	355		
Z12C-300X485	300	485	230	15 2	176		M20× 120		2965	341		140
			240						3175	381		
			245						3273	401		
Z12C-320X520	320	520	240	16 0	184	12	M20× 130	24	3317	398		165
			250						3536	442		
			260						3738	486		
Z12C-340X570	340	570	250	17 6	200		M24× 130	20	4080	510		240
			260						4307	560		
			270						4519	610		
Z12C-360X590	360	590	280	18 0	204		M24× 140		4707	659	820	250
			290						4931	715		
			295						5044	744		
Z12C-390X660	390	660	300	18 8	212		M24× 140	24	5733	860		350
			310						5903	915		
			320						6063	970		
Z12C-420X690	420	690	330	21 4	238		M24× 150	28	6182	1020		410
			340						6470	1100		
			350						6743	1180		
Z12C-460X770	460	770	360	22 4	252	14	M27× 170	24	7222	1300	1210	540
			370						7514	1390		
			380						7789	1480		
Z12C-500X850	500	850	400	24 6	274		M27× 180	30	9400	1880		750
			410						9659	1980		
			420						9905	2080		

注：Z12C 型胀紧联结套螺钉的机械性能等级为 10.9 级。

注：Z12C 型胀紧联结套螺钉的机械性能等级为 10.9 级。

Z13 型胀紧套规格参数表

上海乙谛精密机械有限公司 产品规格表

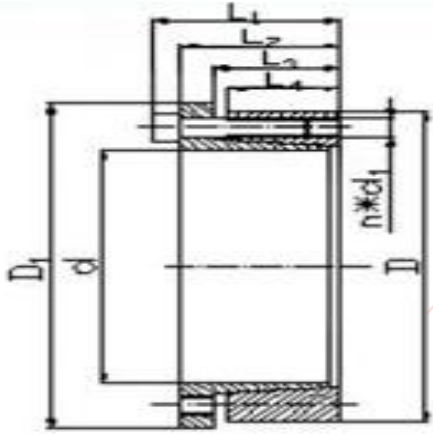

胀紧套基本尺寸								额定负荷		内六角螺钉			Pf N/mm	Pf' N/mm ²	重 量 kg
胀紧套 型号	d	D	L1	L2	L3	L4	D1	转 矩 M1 KN · m	轴向力 F1 KN	d1	n	MA N · m			
	mm														
Z13-20X47	20	47	48	42	29	26	53	0.54	54	M6	7	14	276	117	0.51
Z13-22X47	22	47	48	42	29	26	53	0.6	54	M6	7	14	253	118	0.53
Z13-24X50	24	50	48	42	29	26	56	0.65	54	M6	7	14	230	110	0.55
Z13-25X50	25	50	48	42	29	26	56	0.68	54	M6	7	14	222	111	0.65
Z13-28X55	28	55	48	42	29	26	61	0.76	54	M6	7	14	198	100	0.62
Z13-30X55	30	55	48	42	29	26	61	0.82	54	M6	7	14	186	101	0.80
Z13-32X60	32	60	48	42	29	26	66	1.31	82	M6	11	14	261	139	0.70
Z13-35X60	35	60	48	42	29	26	66	1.44	82	M6	11	14	240	140	0.81
Z13-38X65	38	65	48	42	29	26	71	1.56	82	M6	11	14	220	129	0.77
Z13-40X65	40	65	48	42	29	26	71	1.64	82	M6	11	14	209	129	1.33
Z13-42X75	42	75	59	51	34.4	30	81	2.13	101	M8	6	41	213	119	1.24


Z13-45X75	45	75	59	51	34.4	30	81	2.28	101	M8	6	41	199	119	1.44
Z13-48X80	48	80	59	51	34.4	30	86	2.43	101	M8	6	41	186	112	1.41
Z13-50X80	50	80	59	51	34.4	30	86	2.53	101	M8	6	41	179	112	1.35
Z13-55X85	55	85	59	51	34.4	30	91	4.18	152	M8	9	41	244	158	1.45
Z13-60X90	60	90	59	51	34.4	30	96	4.56	152	M8	9	41	224	149	1.55
Z13-65X95	65	95	59	51	34.4	30	102	4.94	152	M8	9	41	206	141	1.67
Z13-70X110	70	110	66	56	45	40	117	6.5	186	M10	7	83	176	112	2.61
Z13-75X115	75	115	66	56	45	40	122	7	186	M10	7	83	165	107	2.75
Z13-80X120	80	120	66	56	45	40	127	7.4	186	M10	7	83	153	102	2.89
Z13-85X125	85	125	66	56	45	40	132	9	213	M10	8	83	165	112	3.04
Z13-90X130	90	130	66	56	45	40	137	9.6	213	M10	8	83	157	109	3.18
Z13-95X135	95	135	66	56	45	40	142	12.6	267	M10	10	83	185	130	3.33
Z13-100X145	100	145	77	65	52	46	153	13.3	270	M12	7	145	153	105	4.62
Z13-110X155	110	155	77	65	52	46	163	14.7	270	M12	7	145	140	99	5.00
Z13-120X165	120	165	77	65	52	46	173	18.4	309	M12	8	145	147	107	5.37
Z13-130X180	130	180	77	65	52	46	188	25.1	388	M12	10	145	171	124	6.46
Z13-140X190	140	190	87.5	73.5	58.5	51	199	40.15	586	M14	11	230	213	157	7.73
Z13-150X200	150	200	87.5	73.5	58.5	51	209	47	639	M14	12	230	217	163	8.21
Z13-160X210	160	210	87.5	73.5	58.5	51	219	54.3	692	M14	13	230	220	167	8.64
Z13-170X225	170	225	87.5	73.5	58.5	51	234	63	746	M14	14	230	226	171	10.14
Z13-180X235	180	235	87.5	73.5	58.5	51	244	66	746	M14	14	230	212	162	10.66

注:

- 1、表中所列数据为无隔圈“A”配置时胀套的额定负荷，当有隔圈配置时其额定负荷为表列负荷的 62%。
- 2、Z13 型胀紧联结套螺钉的机械性能等级为 12.9 级。

Z14 型胀紧套规格参数表

上海乙谛精密机械有限公司 产品规格表

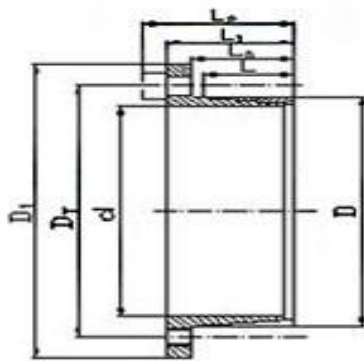


胀紧套基本尺寸									额定负荷		内六角螺钉					
型 号	d	D	DT	D1	L	L0	L1	L2	转 矩 M1 KN • m	轴 向 力 F1 KN						
	mm										d1	n	MA N • m	Pf N/mm ²	Pf' N/mm ²	重 量 kg
Z14-14X25	14								64	9.20	M4	4	2.9	109	61	0.091
Z14-16X25	16								74	9.20	M4	4	2.9	95	61	0.082
Z14-18X25	18	25	33	42	16	20	26	30	82	9.20	M4	4	2.9	85	61	0.072
Z14-19X25	19								87	9.20	M4	4	2.9	80	61	0.068
Z14-20X30	20	30	39	50	16	20	26	31	150	15.00	M5	4	6	124	82	0.113

Z14-22X30	22								165	15.00	M5	4	6	113	82	0.110
Z14-24X30	24								180	15.00	M5	4	6	104	82	0.088
Z14-25X36	25								187	15.0	M5	4	6	100	69	0.144
Z14-28X36	28	36	45	55	16	20	26	31	210	15.0	M5	4	6	89	69	0.121
Z14-30X36	30								225	15.0	M5	4	6	83	69	0.105
Z14-32X42	32								240	15.0	M5	4	6	77	59	0.200
Z14-35X42	35	42	51	62	16	20	28	33	260	15.0	M5	4	6	71	59	0.173
Z14-36X42	36								270	15.0	M5	4	6	69	59	0.162
Z14-38X44	38	44	54	66	16	20	28	34	400	21.20	M6	4	10	93	80	0.182
Z14-40X48	40								425	21.20	M6	4	10	88	73	0.223
Z14-42X48	42	48	58	70	16	20	28	34	446	21.20	M6	4	10	83	73	0.191
Z14-45X55	45								875	38.90	M8	4	25	115	94	0.400
Z14-48X55	48	55	67	82	20	25	35	43	935	38.90	M8	4	25	107	94	0.350
Z14-50X62	50								974	38.90	M8	4	25	103	83	0.500
Z14-55X62	55	62	74	89	20	25	35	43	1070	38.90	M8	4	25	94	83	0.410
Z14-60X72	60	72	81	99	20	25	35	43	1165	38.90	M8	4	25	86	71	0.580

Z14-65X72	65								1265	38.90	M8	4	25	79	71	0.460
注：Z14 型胀紧联结套螺钉的机械性能等级为 8.8 级。																

Z15 型胀紧套规格参数表

上海乙谛精密机械有限公司 产品规格表

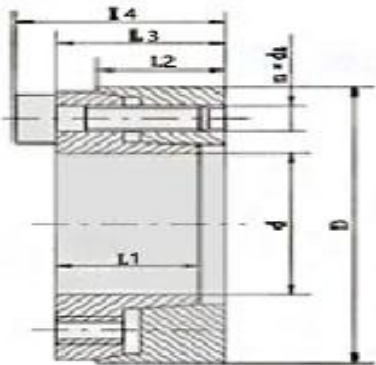

胀紧套基本尺寸 (mm) Dimensions							额定负荷		内六角螺钉			pt	pt	重量
型 号	d	D	L1	L2	L3	L4	转 矩 M t	Ft kN. m	d1	n	MA N. m	N/m m ²	N/m m ²	kg
Z15-20X47	20	47	20	17	23	29	0.34	34	M6	5	17	242	121	0.25
Z15-22X47	22	47	20	17	23	29	0.38	34	M6	5	17	220	121	0.24
Z15-24X50	24	50	20	17	23	29	0.41	34	M6	5	17	202	114	0.27
Z15-25X50	25	50	20	17	23	29	0.43	34	M6	5	17	194	114	0.29
Z15-28X55	28	55	20	17	23	29	0.6	42	M6	6	17	207	124	0.31
Z15-30X55	30	55	20	17	23	29	0.64	42	M6	6	17	194	124	0.3
Z15-35X60	35	60	20	17	23	29	0.9	51	M6	7	17	194	133	0.33
Z15-40X65	40	65	20	17	23	29	1.03	51	M6	8	17	194	140	0.37
Z15-45X75	45	75	24	20	28	36	1.8	80	M8	6	41	200	144	0.62


Z15-50X80	50	80	24	20	28	36	2.3	80	M8	7	41	210	156	0.67
Z15-55X85	55	85	24	20	28	36	2.9	107	M8	8	41	218	169	0.72
Z15-60X90	60	90	24	20	28	36	3.2	107	M8	8	41	200	160	0.77
Z15-65X95	65	95	24	20	28	36	3.8	120	M8	9	41	208	171	0.82
Z15-70X110	70	110	29	24	34	44	6	170	M10	8	83	225	173	1.5
Z15-75X115	75	115	29	24	34	44	6.4	170	M10	8	83	210	166	1.59
Z15-80X120	80	120	29	24	34	44	6.8	170	M10	8	83	197	159	1.67
Z15-85X125	85	125	29	24	34	44	8.1	190	M10	9	83	209	171	1.76
Z15-90X130	90	130	29	24	34	44	9.6	210	M10	10	83	219	183	1.84
Z15-95X135	95	135	29	24	34	44	10.1	210	M10	10	83	207	176	1.9
Z15-100X145	100	145	33	28	38	50	11	220	M12	8	145	190	154	2.58
Z15-110X155	110	155	33	28	38	50	14	250	M12	9	145	194	162	2.79
Z15-120X165	120	165	33	28	38	50	17	280	M12	10	145	198	170	3
Z15-130X180	130	180	38	33	43	55	23	350	M12	12	145	190	158	4.1
Z15-140X190	140	190	38	33	43	55	24	345	M12	12	145	177	150	4.37
Z15-150X200	150	200	38	33	43	55	30	400	M12	14	145	192	166	4.63
Z15-160X210	160	210	38	33	43	55	35	440	M12	15	145	193	170	4.9
Z15-170X225	170	225	43	38	49	63	41	480	M14	12	230	176	151	6.56
Z15-180X235	180	235	43	38	49	63	51	560	M14	14	230	194	168	6.9
Z15-190X250	190	250	51	46	57	71	61	640	M14	16	230	177	150	9.27
Z15-200X560	200	260	51	46	57,	71	72	700	M14	18	230	190	162	9.7
Z15-220X285	220	285	55	50	61	77	99	900	M16	16	355	198	168	12.3
Z15-240X305	240	305	55	50	61	77	108	900	M16	16	355	181	157	13.3
Z15-260X325	260	325	55	50	61	77	130	1000	M16	18	355	188	165	14.3

Z15-280X355	280	355	65	60	73	91	170	1200	M18	18	485	178	152	21.4
Z15-300X375	300	375	65	60	73	91	200	1350	M18	20	485	184	160	22.7
Z15-320X405	320	405	77	72	85	105	275	1700	M20	20	690	189	160	32.2
Z15-340X425	340	425	77	72	85	105	290	1700	M20	20	690	178	152	34
Z15-360X455	360	455	89	84	99	121	385	2000	M22	20	930	181	152	47.2
Z15-380X475	380	475	89	84	99	121	430	2200	M22	21	930	180	153	49.5
Z15-400X495	400	495	89	84	99	121	450	2200	M22	21	930	171	147	51.8
Z15-420X515	420	515	89	84	99	121	545	2500	M22	24	930	186	161	54.2
Z15-440X545	440	545	101	96	113	137	660	3000	M24	24	1200	181	154	72
Z15-460X565	460	565	101	96	113	137	690	3000	M24	24	1200	173	148	74.9
Z15-480X585	480	585	101	96	113	137	720	3000	M24	24	1200	166	143	77
Z15-500X605	500	605	101	96	113	137	880	3400	M24	28	1200	186	162	80.8
Z15-520X630	520	630	101	96	113	137	915	3400	M24	28	1200	179	155	88.1
Z15-540X650	540	650	101	96	113	137	950	3400	M24	28	1200	172	150	91.1
Z15-560X670	560	670	101	96	113	137	1060	3700	M24	30	1200	178	156	94.2
Z15-580X690	580	690	101	96	113	137	1100	3700	M24	30	1200	172	152	97.3

注：Z15 型胀紧联结套螺钉的机械性能等级为 12.9 级。

Z16 型胀紧套规格参数表

-----上海乙谛精密机械有限公司-----产品规格表-----

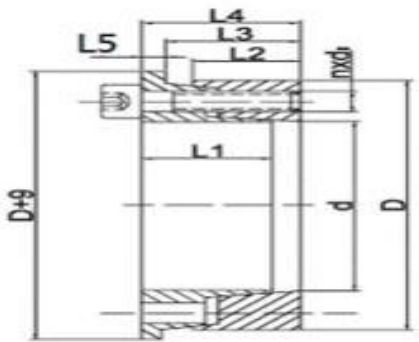

胀紧套基本尺寸 (mm) Dimensions								额定负荷		内六角螺钉			pt N/mm ²	pt N/mm ²	重量 kg
型 号	d	D	L1	L2	L3	L4	L5	t kN. m	轴向力 Ft kN	d1	n	MA N. m			
Z16-20X47	20	47	20	17	23	29	3	0.28	28	M6	6	17	185	92	0.26
Z16-22X47	22	47	20	17	23	29	3	0.31	28	M6	6	17	168	92	0.25
Z16-24X50	24	50	20	17	23	29	3	0.34	28	M6	6	17	154	87	0.28
Z16-25X50	25	50	20	17	23	29	3	0.35	28	M6	6	17	148	87	0.3
Z16-28X55	28	55	20	17	23	29	3	0.52	37	M6	8	17	176	105	0.32
Z16-30X55	30	55	20	17	23	29	3	0.56	37	M6	8	17	164	105	0.31
Z16-35X60	35	60	20	17	23	29	3	0.74	42	M6	9	17	158	109	0.34
Z16-40X65	40	65	20	17	23	29	3	0.93	46	M6	10	17	154	111	0.38
Z16-45X75	45	75	24	20	28	36	4	1.56	69	M8	8	41	170	122	0.64
Z16-50X80	50	80	24	20	28	36	4	2	78	M8	9	41	172	129	0.69
Z16-55X85	55	85	24	20	28	36	4	2.4	86	M8	10	41	173	135	0.75


Z16-60X90	60	90	24	20	28	36	4	2.6	86	M8	10	41	159	, 127	0.8
Z16-65X95	65	95	24	20	28	36	4	3.4	104	M8	12	41	176	145	0.85
Z16-70X110	70	110	29	24	34	44	5	4.8	137	M10	10	83	179	138	1.56
Z16-75X115	75	115	29	24	34	44	5	5.15	137	M10	10	83	167	132	1.65
Z16-80X120	80	120	29	24	34	44	5	6.05	151	M10	11	83	172	139	1.73
Z16-85X125	85	125	29	24	34	44	5	7	164	M10	12	83	177	145	1.83
Z16-90X130	90	130	29	24	34	44	5	7.4	164	M10	12	83	167	140	1.91
Z16-95X135	95	135	29	24	34	44	5	7.8	164	M10	12	83	158	135	1.99
Z16-100X145	100	145	33	28	38	50	5	10.3	207	M12	11	145	166	135	2.68
Z16-110X155	110	155	33	28	38	50	5	11.4	207	M12	11	145	151	126	2.9
Z16-120X165	120	165	33	28	38	50	5	15.8	263	M12	14	145	176	151	3.1
Z16-130X180	130	180	38	33	43	55	5	19.5	301	M12	16	145	161	134	4.25
Z16-140X190	140	190	38	33	43	55	5	21	301	M12	16	145	150	127	4.5
Z16-150X200	150	200	38	33	43	55	5	25.4	338	M12	18	145	157	136	4.8
Z16-160X210	160	210	38	33	43	55	5	30	376	M12	20	145	164	144	5
Z16-170X225	170	225	43	38	49	63	5	35	412	M14	16	230	150	128	6.8
Z16-180X235	180	235	43	38	49	63	5	41.8	464	M14	18	230	159	138	7.1
Z16-190X250	190	250	51	46	57	71	5	51.4	541	M14	21	230	148	125	9.6
Z16-200X260	200	260	51	46	57	71	5	62	619	M14	24	230	161	137	10
Z16-220X285	220	285	55	50	61	77	5	78	714	M16	20	355	156	133	12.7
Z16-240X305	240	305	55	50	61	77	5	92	770	M16	21	355	154	137	13.8
Z16-260X325	260	325	55	50	61	77	5	112	860	M16	24	355	159	140	14.8
Z16-280X355	280	355	65	60	73	91	5	145	1034	M18	24	485	151	129	22.2
Z16-300X375	300	375	65	60	73	91	5	175	1164	M18	27	485	158	137	23.6

Z16-320X405	320	405	77	72	85	105	5	242	1510	M20	27	690	162	137	33.4
Z16-340X425	340	425	77	72	85	105	5	257	1510	M20	27	690	153	131	35.3
Z16-360X455	360	455	89	84	99	121	5	338	1880	M22	24	930	156	131	49
Z16-380X475	380	475	89	84	99	121	5	360	1890	M22	24	930	148	126	51.5
Z16-400X495	400	495	89	84	99	121	5	439	2193	M22	28	930	163	140	53.8
Z16-420X515	420	515	89	84	99	121	5	494	2350	M22	30	930	167	145	56.3
Z16-440X545	440	545	101	96	113	137	5	566	2572	M24	32	1200	153	130	74.8
Z16-460X565	460	565	101	96	113	137	5	592	2572	M24	32	1200	147	126	77.8
Z16-480X585	480	585	101	96	113	137	5	617	2572	M24	32	1200	141	121	81
Z16-500X605	500	605	101	96	113	137	5	723	2893	M24	36	1200	152	132	84
Z16-520X630	520	630	101	96	113	137	5	752	2893	M24	36	1200	146	128	91.6
Z16-540X650	540	650	101	96	113	137	5	781	2893	M24	36	1200	141	123	94.7
Z16-560X670	560	670	101	96	113	137	5	900	3215	M24	40	1200	151	133	97.9
Z16-580X690	580	690	101	96	113	137	5	932	3215	M24	40	1200	145	129	101
Z16-600X710	600	710	101	96	113	137	5	964	3215	M24	40	1200	141	125	104

注： Z16 型胀紧联结套螺钉的机械性能等级为 12.9 级。

Z17A 型胀紧套规格参数表

-----上海乙谛精密机械有限公司-----产品规格表-----

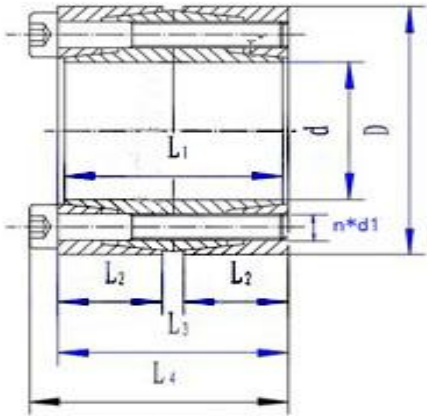

胀紧套基本尺寸 (mm) Dimensions							额定负荷		内六角螺钉			pt	pt	重量
型号	d	D	L1	L2	L3	L4	Mt kN	Ft kN.m	d1	n	MA N. m	N/m ²	N/mm ²	kg
Z17A-30X55	30	55	40	17	46	52	0.9	60	M6	6	17	132	85	0.5
Z17A-35X60	35	60	40	17	46	52	1.25	71	M6	7	17	135	93	0.6
Z17A-40X65	40	65	40	17	46	52	1.5	75	M6	8	17	124	90	0.7
Z17A-45X75	45	75	48	20	56	64	2.5	112	M8	6	41	136	98	1.1
Z17A-50X80	50	80	48	20	56	64	3	120	M8	7	41	132	100	1.2
Z17A-55X85	55	85	48	20	56	64	3.8	138	M8	8	41	138	108	1.3
Z17A-60X90	60	90	48	20	56	64	4.3	143	M8	8	41	127	102	1.4
Z17A-65X95	65	95	48	20	56	64	5.3	162	M8	8	41	132	108	1.5
Z17A-70X110	70	110	58	24	68	78	7.6	219	M10	8	143	110	2.6	2.6
Z17A-75X115	75	115	58	24	68	78	8.2	219	M10	8	83	134	105	2.8
Z17A-80X120	80	120	58	24	68	78	8.7	219	M10	8	83	125	101	2.9


Z17A-85X125	85	125	58	24	68	78	10.4	240	M10	9	83	133	109	3.1
Z17A-90X130	90	130	58	24	68	78	12.3	274	M10	10	83	139	116	3.2
Z17A-95X135	95	135	58	24	68	78	13	274	M10	10	83	132	112	3.3
Z17A-100X145	100	145	66	28	76	88	15	301	M12	8	145	121	98	4.5
Z17A-110X155	110	155	66	28	76	88	18.6	338	M12	9	145	123	103	4.9
Z17A-120X165	120	165	66	28	76	88	22.5	376	M12	10	145	126	108	5.3
Z17A-130X180	130	180	76	33	86	98	29.3	451	M12	12	145	121	101	7.3
Z17A-140X190	140	190	76	33	86	98	31.5	451	M12	12	145	112	95	7.8
Z17A-150X200	150	200	76	33	86	98	39.4	526	M12	14	145	122	106	8.2
Z17A-160X210	160	210	76	33	86	98	45	563	M12	15	145	123	108	8.7
Z17A-170X225	170	225	86	38	98	112	52.5	619	M14	12	230	112	96	11.6
Z17A-180X235	180	235	86	38	98	112	64.9	722	M14	14	230	124	107	12.2
Z17A-190X250	190	250	102	46	114	126	78.3	825	M14	16	230	113	95	16.7
Z17A-200X260	200	260	102	46	114	126	92.7	928	M14	18	230	121	103	17.4
Z17A-220X285	220	285	110	50	122	138	126	1146	M16	16	355	126	107	22.3
Z17A-240X305	240	305	110	50	122	138	138	1146	M16	16	355	115	100	24.1
Z17A-260X325	260	325	110	50	122	138	168	1289	M16	18	355	120	105	25.8
Z17A-280X355	280	355	130	60	146	164	217	1552	M18	18	485	113	97	38.2
Z17A-300X375	300	375	130	60	146	164	259	1724	M18	20	485	117	102	40.6
Z17A-320X405	320	405	154	72	170	190	358	2236	M20	20	690	120	102	58.6
Z17A-340X425	340	425	154	72	170	190	380	2236	M20	20	690	113	97	61.8
Z17A-360X455	360	455	178	84	198	220	501	2784	M22	20	930	115	97	85
Z17A-380X475	380	475	178	84	198	220	555	2923	M22	21	930	115	97	87.2
Z17A-400X495	400	495	178	84	198	220	584	2923	M22	21	930	109	93	93.4

Z17A-420X515	420	515	178	84	198	220	657	3132	M22	24	930	111	96	97.5
Z17A-440X545	440	545	202	96	226	250	795	3617	M24	24	1200	108	92	128.9
Z17A-460X565	460	565	202	96	226	250	831	3617	M24	24	1200	103,	88	134.1
Z17A-480X585	480	585	202	96	226	250	868	3617	M24	24	1200	99	85	139.3
Z17A-500X605	500	605	202	96	226	250	985	3940	M24	28	1200	104	91	144.5
Z17A-520X630	520	630	202	96	226	250	1024	3940	M24	28	1200	100	88	157.6
Z17A-540X650	540	650	202	96	226	250	1063	3940	M24	28	1200	96	84	163.1
Z17A-560X670	560	670	202	96	226	250	1181	4219	M24	30	1200	100	88	168.6
Z17A-580X670	580	670	202	96	226	250	1224	4219	M24	30	1200	96	84	174
Z17A-600X710	600	710	202	96	226	250	1266	4219	M24	30	1200	92	83	179.5

注：Z17A 型胀紧联结套螺钉的机械性能等级为 12.9 级。

Z17B 型胀紧套规格参数表

-----上海乙谛精密机械有限公司-----产品规格表-----

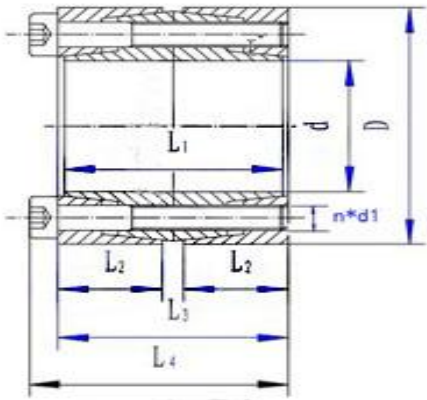


胀紧套基本尺寸 (mm) Dimensions							额定负荷		内六角螺钉			pt N/mm ²	pt N/mm ²	重量 kg
型 号	d	D	L1	L2	L3	L4	Mt kN	Ft kN. m	d1	n	MA N. m			
Z17B-100X145	100	145	66	28	76	86	10.3	206	M10	8	83	83	67	4.5
Z17B-110X155	110	155	66	28	76	86	12.7	232	M10	9	83	85	71	4.9
Z17B-120X165	120	165	66	28	76	86	15.5	258	M10	10	83	86	74	5.3
Z17B-130X180	130	180	76	33	86	96	20.1	310	M10	12	83	83	69	7.3
Z17B-140X190	140	190	76	33	86	96	21.6	310	M10	12	83	77	65	7.8
Z17B-150X200	150	200	76	33	86	96	27	361	M10	14	83	84	73	8.2
Z17B-160X210	160	210	76	33	86	96	31	387	M10	15	83	84	74	8.7
Z17B-170X225	170	225	86	38	98	110	38.3	451	M12	12	145	82	70	11.6
Z17B-180X235	180	235	86	38	98	110	47.3	526	M12	14	145	90	78	12.2
Z17B-190X250	190	250	102	46	114	126	57	601	M12	16	145	82	69	16.7

Z17B-200X260	200	260	102	46	114	126	67.6	676	M12	18	145	88	75	17.4
Z17B-220X285	220	285	110	50	122	136	90.7	825	M14	16	230	90	77	22.3
Z17B-240X305	240	305	110	50	122	136	99	825	M14	16	230	83	72	24.1
Z17B-260X325	260	325	110	50	122	136	120.6	928	M14	18	230	86	76	25.8
Z17B-280X355	280	355	130	60	146	162	180.5	1289	M16	18	355	94	80	38.2
Z17B-300X375	300	375	130	60	146	162	215	1433	M16	20	355	97	84	40.6
Z17B-320X405	320	405	154	72	170	188	276	1724	M18	20	485	93	78	58.6
Z17B-340X425	340	425	154	72	170	188	293	1724	M18	20	485	87	75	61.8
Z17B-360X455	360	455	178	84	198	216	372	2069	M18	24	485	86	72	85
Z17B-380X475	380	475	178	84	198	216	393	2069	M18	24	485	81	69	89.2
Z17B-400X495	400	495	178	84	198	216	414	2069	M18	24	485	77	66	93.4
Z17B-420X515	420	515	178	84	198	216	507	2413	M18	28	485	86	74	97.5
Z17B-440X545	440	545	202	96	226	246	517	2348	M20	24	690	70	59	128.9
Z17B-460X565	460	565	202	96	226	246	540	2348	M20	24	690	67	57	134.1
Z17B-480X585	480	585	202	96	226	246	564	2348	M22	24	690	64	55	139.3
Z17B-500X605	500	605	202	96	226	246	685	2740	M22	28	690	72	63	144.5
Z17B-520X630	520	630	202	96	226	246	712	2740	M22	28	690	69	60	157.6
Z17B-540X650	540	650	202	96	226	246	740	2740	M22	28	690	67	58	163.1
Z17B-560X670	560	670	202	96	226	246	822	2935	M20	30	690	69	60	168.6
Z17B-580X690	580	690	202	96	226	246	851	2935	M20	30	690	66	59	174
Z17B-600X710	600	710	202	96	226	246	880	2935	M20	30	690	64	57	179.5

注：Z17B 型胀紧联结套螺钉的机械性能等级为 12.9 级。

Z18 型胀紧套规格参数表

-----上海乙谛精密机械有限公司-----产品规格表-----

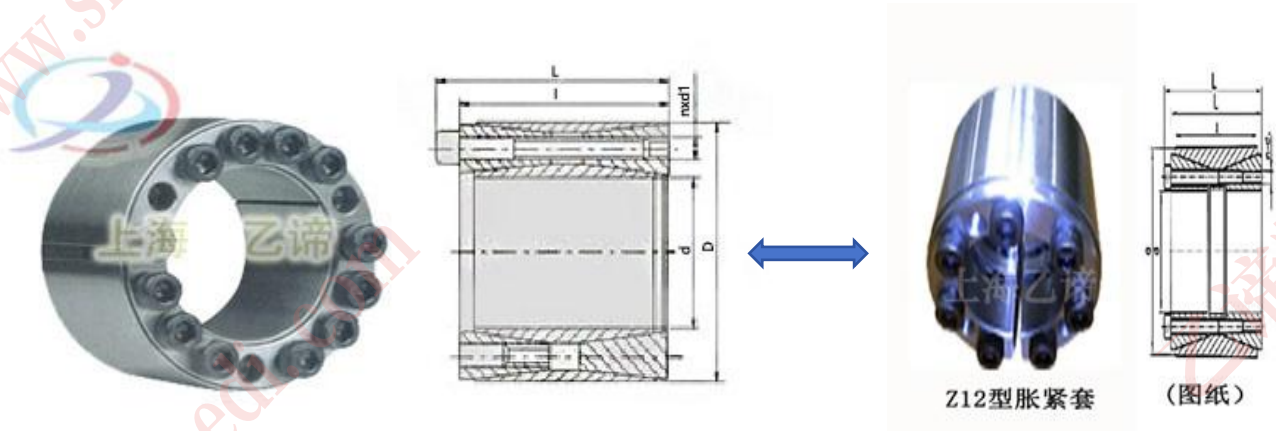

Z12 型胀紧套，可替代 Z18 型胀紧套（左侧为 Z18 实物图及图纸，右侧为：Z12 实物图及图纸）


胀紧套基本尺寸（mm） Dimensions					额定负荷		内六角螺钉			pt N/mm ²	pt N/m ²	重量 kg
型 号	d	D	l	L	Mt kN. m	Ft kN	d1	n	MA N. m			
Z18-45X75	45	75	64	72	3.9	174	M8	9	41	185	110	1.5
Z18-48X80	48	80	64	72	4.15	174	M8	9	41	170	105	1.7
Z18-50X80	50	80	64	72	4.3	174	M8	9	41	165	105	1.6
Z18-55X85	55	85	64	72	4.8	174	M8	9	41	150	95	1.7
Z18-60X90	60	90	64	72	6.4	213	M8	11	41	170	110	1.8
Z18-65X95	65	95	64	72	6.9	213	M8	11	41	155	105	2
Z18-70X110	70	110	78	88	11.8	338	M10	11	83	185	115	3.6
Z18-75X115	75	115	78	88	12.7	338	M10	11	83	170	110	3.8
Z18-80X120	80	120	78	88	14.7	369	M10	12	83	175	115	4
Z18-85X125	85	125	78	88	15.7	369	M10	12	83	165	110	4.3

Z18-90X130	90	130	78	88	18	400	M10	13	83	170	115	4.5
Z18-95X135	95	135	78	88	19	400	M10	13	83	160	110	4.7
Z18-100X145	100	145	100	112	26.9	538	M12	12	145	160	110	7.2
Z18-110X155	110	155	100	112	32	583	M12	13	145	155	110	7.7
Z18-120X165	120	165	100	112	40.3	673	M12	15	145	165	120	8.3
Z18-130X180	130	180	116	130	52	800	M14	13	230	155	115	11.7
Z18-140X190	140	190	116	130	64.6	923	M14	15	230	170	125	12.5
Z18-150X200	150	200	116	130	73.8	985	M14	16	230	165	125	13.2
Z18-160X210	160	210	116	130	83.7	1045	M14	17	230	165	125	14
Z18-170X225	170	225	146	162	109	1283	M16	15	355	150	115	20.6
Z18-180X235	180	235	146	162	123	1369	M16	16	355	150	115	21.6
Z18-190X250	190	250	146	162	138	1454	M16	17	355	150	115	25
Z18-200X260	200	260	146	162	145	1454	M16	17	355	145	110,	26.2
Z18-220X285	220	285	146	162	188	1710	M16	20	355	155	120	31.1
Z18-240X305	240	305	146	162	225	1880	M16	22	355	155	120	33.6
Z18-260X325	260	325	146	162	244	1880	M16	22	355	145	115	36.1
Z18-280X355	280	355	177	197	373	2670	M20	20	690	155	120	54.9
Z18-300X375	300	375	177	197	440	2930	M20	22	690	155	120	58.3
Z18-320X405	320	405	177	197	470	2930	M20	22	690	145	115	71

注：Z18 型胀紧联结套螺钉的机械性能等级为 12.9 级。

Z19A 型胀紧套规格参数表

上海乙谛精密机械有限公司 产品规格表

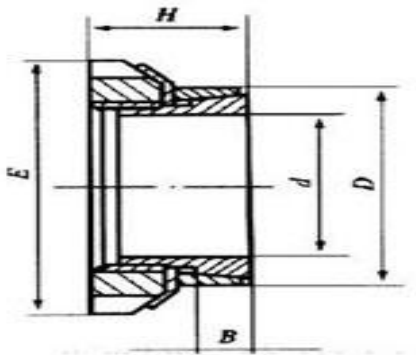


胀紧套基本尺寸 (mm) Dimensions						额定负荷		螺母		p N/mm ²	pt N/mm ²	重量 kg
型 号	d	D	E	H	B	Mt kN· m	Ft kN	d1	MA N· m			
Z19A-14X25	14	25	32	16.5	6.5	38	5.1	M20×1	95	200	110	0.05
Z19A-15X25	15	25	32	16.5	6.5	41	5.5	M20×1	95	185	110	0.04
Z19A-16X25	16	25	32	16.5	6.5	43	5.45	M20×1	95	174	110	0.04
Z19A-17X26	17	26	32	16.5	6.5	47	5.5	M20×1	95	164	107	0.04
Z19A-18X26	18	26	32	16.5	6.5	49	5.4	M22×1	95	155	107	0.04
Z19A-18X30	18	30	38	16.5	6.5	58	6.6	M25×1.5	160	185	112	0.06
Z19A-19X30	19	30	38	18	6.5	62	6.6	M25×1.5	160	176	112	0.06
Z19A-20X30	20	30	38	18	6.5	66	6.6	M25×1.5	160	167	111	0.06
Z19A-22X32	22	32	38	18	6.5	73	6.6	M25×1.5	160	152	105	0.06
Z19A-24X35	24	35	45	18	6.5	105	8.75	M30×1.5	220	185	127	0.08

Z19A-25X35	25	35	45	18	6.5	110	8.8	M30×1.5	220	178	127	0.07
Z19A-28X36	28	36	45	18	6.5	120	8.55	M32×1.5	220	159	124	0.06
Z19A-28X40	28	40	52	18	6.5	149	10.6	M35×1.5	340	188	141	0.09
Z19A-30X40	30	40	52	19.5	7	160	10.6	M35×1.5	340	164	123	0.09
Z19A-32X42	32	42	52	19.5	7	170	10.6	M36×1.5	340	154	117	0.09
Z19A-35X45	35	45	58	21.5	8	230	13.1	M40×1.5	480	153	120	0.11
Z19A-36X45	36	45	58	21.5	8	240	13.3	M40×1.5	480	149	120	0.1
Z19A-38X48	38	48	58	21.5	8	250	13.1	M42×1.5	480	141	112	0.12
Z19A-38X50	38	50	58	21.5	8	250	13.1	M42×1.5	480	141	112	0.14
Z19A-40X50	40	50	65	24.5	10	310	15.5	M42×1.5	680	124	93	0.14
Z19A-40X52	40	52	65	24.5	10	310	15.5	M45×1.5	680	120	93	0.17
Z19A-42X55	42	55	65	25.5	10	320	15.2	M48×1.5	680	114	87	0.2
Z19A-45X55	45	55	70	25.5	10	400	17.7	M50×1.5	870	122	96	0.16
Z19A-45X57	45	57	70	25.5	10	400	17.7	M50×1.5	870	122	96	0.2
Z19A-48X60	48	60	75	25.5	10	500	20.8	M55×2	970	135	105	0.21
Z19A-50X60	50	60	75	25.5	10	520	20.8	M55×2	970	130	105	0.18
Z19A-50X62	50	62	75	25.5	10	520	20.8	M55×2	970	130	105	0.22
Z19A-55X65	55	65	80	27.5	12	610	22	M60×2	1100	103	84	0.21
Z19A-55X68	55	68	80	27.5	12	610	22	M60×2	1100	103	84	0.28
Z19A-56X68	56	68	80	27.5	12	620	22	M60×2	1100	101	82	0.26
Z19A-60X70	60	70	85	30	12	800	26.6	M65×2	1300	113	93	0.24
Z19A-60X73	60	73	85	30.5	12	800	26.6	M65×2	1300	113	93	0.33
Z19A-63X79	63	79	92	30.5	14	980	31.1	M70×2	1600	107	86	0.43
Z19A-65X79	65	79	92	30.5	14	1010	31	M70×2	1600	104	86	0.38

Z19A-70X84	70	84	98	31.5	14	1240	35.4	M75×2	2000	110	92	0.42
------------	----	----	----	------	----	------	------	-------	------	-----	----	------

Z19B 型胀紧套规格参数表

上海乙谛精密机械有限公司 产品规格表

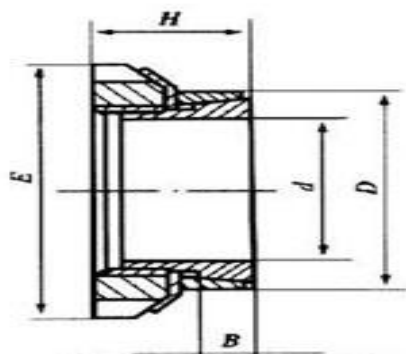


胀紧套基本尺寸 (mm) Dimensions						额定负荷		螺母		胀套与轴结合面上的压力	胀套与轮载结合面上的压力	重量
型号	d	D	E	H	B	Mt kN·m	Ft kN	d1	MA N·m	pt N/mm ²	pt N/mm ²	kg
Z19B-14X25	14	25	32	30	20	64	9.1	M20×1	95	85	45	0.08
Z19B-15X25	15	25	32	30	20	70	9.1	M20×1	95	80	45	0.08
Z19B-16X25	16	25	32	30	20	73	9.1	M20×1	95	75	45	0.07
Z19B-17X25	17	25	32	32	20	80	9.1	M22×1	95	70	45	0.07
Z19B-18X30	18	30	32	32	20	83	9.1	M22×1	95	65	40	0.12
Z19B-19X30	19	30	38	32	20	105	11	M25×1.5	160	75	45	0.11
Z19B-20X30	20	30	38	32	20	112	11	M25×1.5	160	70	45	0.1
Z19B-22X22	22	35	45	36	25	163	14.5	M30×1.5	220	70	45	0.17
Z19B-24X35	24	35	45	36	25	178	14.5	M30×1.5	220	65	45	0.15
Z19B-25X35	25	35	45	36	25	185	14.5	M30×1.5	220	60	45	0.14
Z19B-28X40	28	40	52	42	30	250	14.5	M35×1.5	340	55	40	0.22

Z19B-30X40	30	40	52	42	30	270	17.5	M35×1.5	340	50	40	0.19
Z19B-32X42	32	42	52	44	30	350	21.5	M36×1.5	340	60	45	0.2
Z19B-32X45	32	45	58	44	30	350	21.5	M40×1.5	480	60	45	0.27
Z19B-35X45	35	45	58	44	30	390	21.5	M40×1.5	480	55	45	0.22
Z19B-38X50	38	50	65	45	30	500	26	M45×1.5	680	60	45	0.3
Z19B-40X50	40	50	65	45	30	520	26	M45×1.5	680	60	50	0.25
Z19B-45X55	45	55	70	46	30	680	30	M50×1.5	870	60	50	0.29
Z19B-48X60	48	60	75	46	30	840	35	M55×2	970	60	50	0.37
Z19B-50X60	50	60	75	46	30	880	35	M55×2	970	60	50	0.32
Z19B-55X65	55	65	80	46	30	1030	37.5	M60×2	1100	60	50	0.34
Z19B-60X70	60	70	85	52	30	1360	45	M65×2	1300	65	55	0.42

Z20 型胀紧套（锁紧盘）规格参数表

-----上海乙谛精密机械有限公司-----产品规格表-----

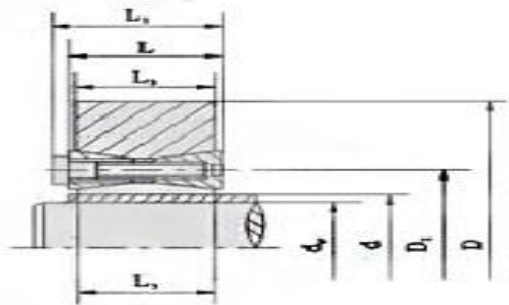



胀紧套基本尺寸 (mm) Dimensions								额定负荷		内六角螺钉			重量 kg
型 号 dxdw	d	dw	D	D1	L4	L	L3	转矩 Mt kN. m	轴向力 Ft kN	d1	n	MA N. m	
Z20-25x18 Z20-25x20	25	18 20	60	37.5	27.5	20	17	0.190 0.255	21 25	M6×18	9	17	0.37
Z20-30x20 Z20-30x22 Z20-30x24	30	20 22 24	65	42.5	27.5	20	17	0.205 0.270 0.340	20 24 28	M6×18	9	17	0.42
Z20-35x25 Z20-35x28 Z20-35x30	35	25 28 30	72	47.5	27.5	20	17	0.365 0.490 0.585	29 35 39	M6×18	12	17	0.48
Z20-40x30 Z20-40x32 Z20-40x34 Z20-40x35	40	30 32 34 35	78	52.5	27.5	20	17	0.555 0.590 0.710 0.770	37 37 42 44	M6×18	15	17	0.54
Z20-45x35 Z20-45x36 Z20-45x38	45	35 36 38	92	60	33.5	24	20	0.960 1.030 1.200	55 57 63	M8×22	12	41	0.92

Z20-50x38 Z20-50x40 Z20-50x42	50	38 40 42	98	65	33.5	24	24	1.010 1.160 1.320	53 58 63	M8×22	12	41	1.0
Z20-55x42 Z20-55x45 Z20-55x48	55	42 45 48	105	70	33.5	24	24	1.330 1.590 1.880	63 70 78	M8×22	14	41	1.1
Z20-60x48 Z20-60x50 Z20-60x52	60	48 50 52	110	75	33.5	24	24	1.600 1.780 1.890	67 71 73	M8×22	14	41	1.2
Z20-70x55 Z20-70x58 Z20-70x60	70	55 58 60	138	90	39.5	28	24	2.930 3.370 3.690	106 116 123	M10×25	14	83	2.3
Z20-80x62 Z20-80x65 Z20-80x68 Z20-80x70	80	62 65 68 70	145	100	39.5	28	24	3.140 3.570 4.020 4.350	101 110 118 124	M10×25	14	83	2.4
Z20-90x70 Z20-90x75 Z20-90x78	90	70 75 78	160	110	39.5	28	24	4.090 4.890 5.420	117 130 139	M10×25	16	83	2.8
Z20-100x78 Z20-100x80 Z20-100x82 Z20-100x85	100	78 80 82 85	180	122.5	47	33	26	5.980 6.370 6.490 7.160	153 159 158 168	M12×30	14	145	3.8
Z20-110x85 Z20-110x88 Z20-110x90 Z20-110x95	110	85 88 90 95	190	132.5	47	33	26	6.180 6.800 7.240 8.380	145 154 160 176	M12×30	14	145	4.1
Z20-120x95 Z20-120x100 Z20-120x105	120	95 100 105	205	142.5	47	33	26	8.250 9.450 10.740	173 189 204	M12×30	16	145	4.7
Z20-140x110 Z20-140x115 Z20-140x120	140	110 115 120	230	165	52	38	34	12.860 14.440 16.140	233 251 269	M12×35	22	145	7.4
Z20-160x125 Z20-160x130 Z20-160x135	160	125 130 135	260	185	52	38	34	17.130 18.990 20.940	274 292 310	M12×35	26	145	9.2

Z20-160x140		140						23.000	328			
注：Z20 型联结紧套螺钉的机械性能等级为 12.9 级。												


Za 型胀紧套（锁紧盘）规格参数表

上海乙谛精密机械有限公司 产品规格表

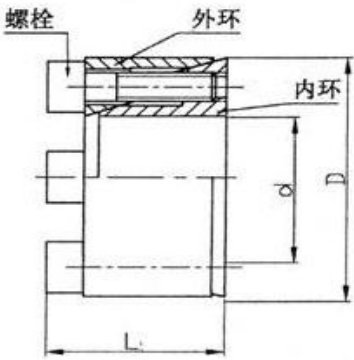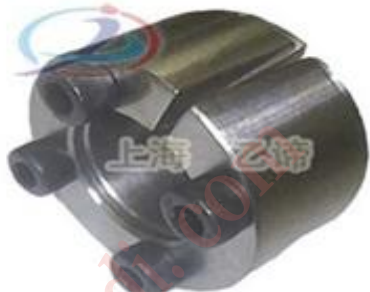

胀紧套基本尺寸					内六角螺钉		额定负荷		Pf N/mm ²	MA N • m	重量 kg
型 号	d	D	L	L1	d1	n	轴向力	扭矩			
	mm						Ft N	Mt N • m			
Za-10x20	10	20	13	15.5	M2.5*12	4	2900	14.4	97	0.85	0.019
Za-11x22	11	22	13	15.5	M2.5*12	4	2900	15.3	88	0.85	0.024
Za-12x22	12	22	13	15.5	M2.5*12	4	2900	17.1	88	0.85	0.022
Za-14x26	14	26	17	20	M3*16	4	4380	31	88	1.68	0.039
Za-15x28	15	28	17	20	M3*16	4	4380	32.5	79	1.68	0.044
Za-16x32	16	32	17	21	M4*16	4	7700	61	145	3.5	0.068
Za-17x35	17	35	21	25	M4*20	4	7700	63	106	3.5	0.093
Za-18x35	18	35	21	25	M4*20	4	7700	68	97	3.5	0.090
Za-19x35	19	35	21	25	M4*20	4	7700	72	97	3.5	0.085
Za-20x38	20	38	21	26	M5*20	4	12600	126	132	6.6	0.12
Za-22x40	22	40	21	26	M5*20	4	12600	135	124	6.6	0.13

Za-24x47	24	47	26	32	M6*25	4	17900	207	132	11.8	0.22
Za-25x47	25	47	26	32	M6*25	4	17900	216	124	11.8	0.21
Za-28x50	28	50	26	32	M6*25	6	26120	365	169	11.8	0.24
Za-30x55	30	55	26	32	M6*25	6	26120	387	159	11.8	0.27
Za-32x55	32	55	26	32	M6*25	6	26120	421	150	11.8	0.26
Za-35x60	35	60	31	37	M6*30	8	34990	633	142	11.8	0.37
Za-38x65	38	65	31	37	M6*30	8	34900	667	132	11.8	0.42
Za-40x65	40	65	31	37	M6*30	8	34900	696	124	11.8	0.41
Za-42x75	42	75	36	44	M8*35	6	48000	1011	159	28.6	0.70
Za-45x75	45	75	36	44	M8*35	6	48000	1095	124	28.6	0.63
Za-48x80	48	80	36	44	M8*35	8	64270	1560	169	28.6	0.73
Za-50x80	50	80	36	44	M8*35	8	64270	1610	159	28.6	0.71

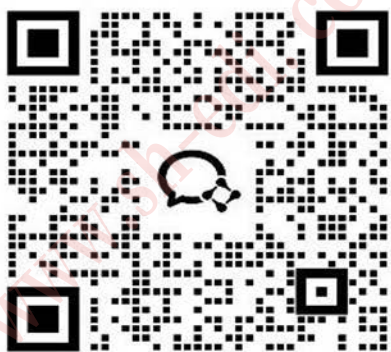

上海乙谛精密机械有限公司

电话: 13681712040

E-mail: sales@edijx.com

网站: www.sh-edl.com