


Z3 型胀紧套规格参数表

-----上海乙谛精密机械有限公司-----产品规格表-----

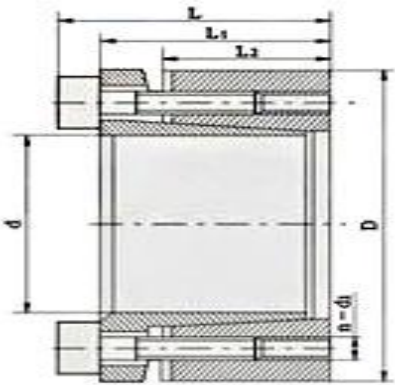

胀紧套基本尺寸							额定负荷		胀套与轴	胀套与轮	螺钉的	重量 kg						
型号	d	D	L	L1	L2	d1	n	轴向力 F1 KN	转 矩 M1 KN·m	结合面上	毂结合面		拧 紧					
	mm									的 压 力 Pf N/mm²	上的压力 Pf' N/mm²		力 矩 MA N·m					
Z3-20X47	20	47	37	31	21.7	M6	4	30	0.30	287	90	17	0.29					
Z3-22X47	22	47							0.33	260	90		0.27					
Z3-25X50	25	50					5	35	0.44	287	106		0.30					
Z3-28X55	28	55							0.49	256	96		0.36					
Z3-30X55	30	55							0.53	239	96		0.34					
Z3-35X60	35	60						45	0.81	246	106		0.38					
Z3-40X65	40	65							0.94	215	98		0.41					
Z3-45X75	45	75	46	38	25.3	M8	6	80	1.86	283	134	41	0.70					
Z3-50X80	50	80							2.07	255	126		0.76					
Z3-55X85	55	85					7	90	2.54	270	138		0.82					
Z3-60X90	60	90							2.77	247	130		0.88					
Z3-65X95	65	95						8	105	3.58	261		141	0.94				
Z3-70X110	70	110					60	50	33.4	M10	7		140	5.10	244	128	83	2.10
Z3-75X115	75	115												5.46	228	119		2.20
Z3-80X120	80	120	5.85	214	112	2.30												
Z3-85X125	85	125	8	175	7.45	230					129	2.40						

Z3-90X130	90	130						7.90	217	124	2.60		
Z3-95X135	95	135						205	9.90	257	149		2.70
Z3-100X145	100	145						220	11.00	192	114		3.70
Z3-105X150	105	150							11.55	210	114		3.90
Z3-110X155	110	155							12.10	175	107		4.00
Z3-120X165	120	165	68	58	40.8		12	260	15.70	192	120		4.30
Z3-125X170	125	170						320	17.50	189	120		4.80
Z3-130X180	130	180							20.70	188	120		5.90
Z3-140X190	140	190							22.50	175	114		6.30
Z3-150X200	150	200	77	65	45.4		12	380	28.50	196	130		6.70
注：Z3 型胀紧联结套螺钉的机械性能等级为 12.9 级。													