
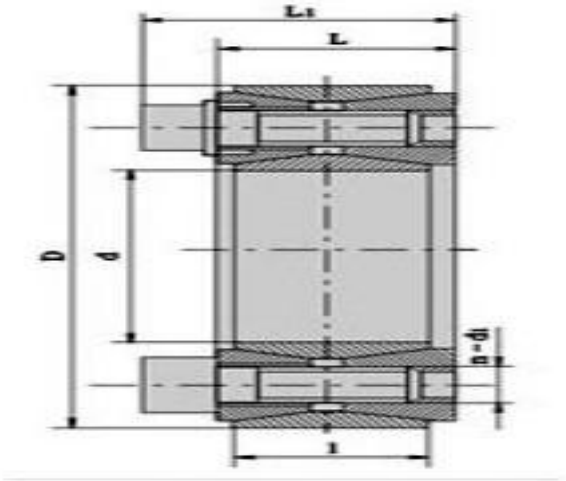


Z2 型胀紧套规格参数表

-----上海乙谛精密机械有限公司-----产品规格表-----

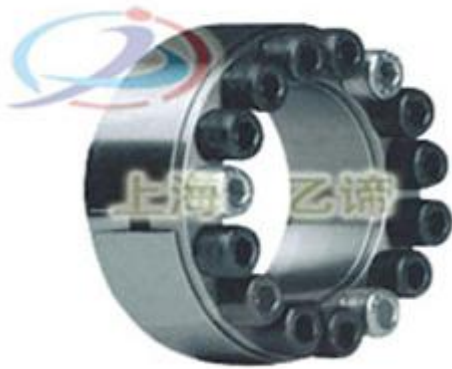

胀紧套基本尺寸							额定负荷		胀套 与轴 结合 面上的 压 力 Pf N/m ²	胀套 与轮 毂结 合面 上的 压力 Pf' N/m ²	螺钉 的 拧 紧 力 矩 MA N·m	重 量 kg	
型 号	d	D	l	L	L1	d 1	n	轴向 力 F1K N					转 矩 M 1 KN·m
	mm												
Z2-17X47	17	47	17	20	27.5	M6	8	27					
Z2-18X47	18												
Z2-19X47	19								0.25	220	90	14	0.20
Z2-20X47	20								0.27	210	90		0.24
Z2-22X47	22								0.30	195	90		0.23
Z2-25X50	25	50					9	30	0.38	190	95	0.25	

Z2-28X55	28	55					10	33	0.47	185	95		0.30				
Z2-30X55	30								0.50	175	95			0.29			
Z2-35X60	35								60	0.70	180				105	0.32	
Z2-38X63	38								63	0.88	185				105		0.33
Z2-40X65	40								65	0.92	180				110		
Z2-42X72	42	72	12	65	1.36	200	117	35	0.48								
Z2-45X75	45	75		72	1.62	210	125			0.57							
Z2-50X80	50	80		71	1.77	190	115				0.60						
Z2-55X85	55	85	14	83	2.27	200	130					0.63					
Z2-60X90	60	90		2.47	180	120	0.69										
Z2-65X95	65	95	16	93	3.04	190		130	0.73								
Z2-70X110	70	110	14	132	4.60	210		130		70			1.26				
Z2-75X115	75	115		131	4.90	195		125			1.33						
Z2-80X120	80	120			5.20	180		120				1.40					
Z2-85X125	85	125	16	148	6.30	195	130	1.49									
Z2-90X130	90	130		147	6.60	180	125		1.53								
Z2-95X135	95	135	18	167	7.90	195	135			1.62							
Z2-100X145	100	145	14	192	9.60		135				125		2.01				
Z2-105X150	105	150		190	9.98	185	130					2.10					
Z2-110X155	110	155		191	10.50	180	125	2.15									
Z2-120X165	120	165	16	218	13.10	185	135		2.35								
Z2-125X170	125	170	18	220	13.78	180	130			2.95							
Z2-130X180	130	180	20	272	17.60	165	120				3.51						
Z2-140X190	140	190		22	298	20.90	165					125	3.85				
Z2-150X200	150	200		24	324	24.20	170	125				4.07					
Z2-160X210	160	210		26	350	28.00		130	4.30								
Z2-170X225	170	225		38	44	60	M14	22		386				32.80	160	120	190

	0	5											
Z2-180X235	180	235					24	420	37.80	165	125		6.05
Z2-190X250	190	250	46	52	68		28	490	46.50	150	115		8.25
Z2-200X260	200	260					30	525	52.50	150	115		8.65
Z2-210X275	210	275					24	599	62.89	151	115		10.10
Z2-220X285	220	285					26	620	68.00	150	115		11.22
Z2-240X305	240	305	50	56	74	M16	30	715	85.50	160	125	295	12.20
Z2-350X315	250	315					32	768	96.00	162	125		12.70
Z2-260X325	260	325					34	800	104.00	165	130		13.20
Z2-280X355	280	355	60	66	86.5	M18	32	915	128.00	145	115	405	19.20
Z2-300X375	300	375						1020	153.00		120		20.50
Z2-320X405	320	405	72	78	100.5	M20		1310	210.00	150	120	580	29.60
Z2-340X425	340	425							224.00		115		31.10
Z2-360X455	360	455					36	1630	294.00	145	115		42.20
Z2-380X475	380	475	84	90	116.0	M22		1620	308.00	135	110	780	44.00
Z2-400X495	400	495						1610	322.00	130	105		46.00
Z2-420X515	420	515					40	1780	374.00	135	110		50.00
Z2-450X555	450	555					40	2050	461.25		100		65.00
Z2-480X585	480	585	96	102	130.0	M24	42	2160	518.40	124	100		71.00
Z2-500X605	500	605					44	2240	560.00	123	100	1000	72.60
Z2-530X640	530	640					45	2330	617.00	121	100		83.60
Z2-560X670	560	670					48	244	680.00	120	100		85.00

	0	0					0					
Z2-600X710	60	71					50	258	775.00	118	100	91.00
	0	0						0				
Z2-630X740	63	74					52	268	844.00	117	105	94.00
	0	0						0				
Z2-670X780	67	78					56	282	944.00	116	100	101.00
	0	0						0				
Z2-710X820	71	82					60	297	1054.00	115	100	106.00
	0	0						0				
Z2-750X860	75	86					62	313	1173.00	115	100	112.00
	0	0						0				
Z2-800X910	80	91					66	326	1300.00	112	100	118.00
	0	0						0				
Z2-850X960	85	96					70	350	1487.00	113	100	125.00
	0	0						0				
Z2-900X1010	90	10					75	368	1650.00	112	100	132.00
	0	10						0				
Z2-950X1060	95	10					80	387	1838.00		100	139.00
	0	60						0				
Z2-1000X1110	10	11					82	400	2000.00	110	100	146.00
	00	10						0				
注：Z2 型胀紧联结套螺钉的机械性能等级为 12.9 级。												